

A STANDARD THAT IS TRULY GLOBAL



CONTENT

01	Truck Bus Radial	3-27
02	Light Truck Radial	28-36
03	Truck Bus Bias	37-51
04	Light commercial vehicle	52-66
05	PCR/SUV	67-81
06	2/3 Wheelers	82-98



WHO WE ARE

We are JK Tyre & Industries Ltd., one of India's foremost tyre manufacturers and among the top 25 in the world. Our superior treads and technology have helped businesses outperform themselves on farms, in factories, on roads and even in mines.

We've kept the wheels turning since 1977. With 9 manufacturing units in India and 3 in Mexico, we produce 35 million tyres every year. In other words, 35 million ways for you to get the bang for your buck, every single time.



TRUCK BUS RADIAL



TRUCK BUS RADIAL PATTERNS



JETWAY -JUH



JETWAY JUH-XD



JETWAY JUH3



JETWAY JUH3+



JETWAY JUH4



JETWAY JUH5



JETWAY JUH6



JETWAY JUX



JETWAY JUX+



JETWAY JUL2



JETWAY JUL2+



JETWAY JUL3



JETWAY JUL4



JETWAY JUM



JETWAY JUM XM



JETWAY JUC



JETWAY JUC XM



JETWAY JUC2



JETWAY JUC3



JETWAY JUC3+



JETWAY JUC4



JETWAY JUC5



JETWAY JUC XD



JETSTEEL JDL XM



JETSTEEL JDL2






JETSTEEL JDL3



JETSTEEL JDH



JETSTEEL JDH3



JETSTEEL JDH5+



JETSTEEL JDH6



JETSTEEL JDE++



JETSTEEL JDE INA



JETSTEEL JDC



JETSTEEL JDC XD



JETSTEEL JDC3



JETSTEEL JDC5



JETSTEEL JDO XD



JETWAY JTH1



JETWAY JTHSD



JETWAY JTL



JETWAY JUX



JETSTEEL JDE XF



JETSTEEL JDO XD



JETWAY-JUH

SALIENT FEATURES

- 4 Rib design
- Wider shoulders
- Twisted groove geometry
- Unique pattern design

BENEFITS

- Uniform pressure distribution
- Improved shoulder wear
- Less stone entrapment
- Reduced erosion wear

AVAILABLE SIZES:

11R22.5, 11R24.5, 12.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11R22.5	16	8.25	1048	280	14.0	L (120)	148/145	3150	2900	850
11R22.5	16	8.25	1048	280	14.0	M (130)	148/145	3150	2900	850
11R24.5	16	8.25	1098	280	14.0	L (120)	149/146	3250	3000	830
12.00R20	18	8.50	1115	318	14.5	K (110)	154/151	3750	3450	830



JETWAY JUH-XD

SALIENT FEATURES

- Zig-zag groove with unique lateral sipe
- 5 rib tread design with optimized rib distribution
- Robust casing
- Stone ejectors
- New tread compound

BENEFITS

- Better traction & grip at wet surface
- For better vehicle handling and directional stability
- For longer tyre life
- To reduce stone entrapment, resulting in reduced chunking
- For higher mileage and cooler running

AVAILABLE SIZES:

295/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
295/80R22.5	16	9.00	1048	295	17.0	M(130)	152/148	3550	3150	850



JETWAY JUH3

SALIENT FEATURES

- Wider shoulders
- Pyramidal grooves design
- Unique pattern design
- Tread compound

BENEFITS

- Improved shoulder wear and even pressure distribution
- Less stone entrapment
- Reduced erosion wear
- Uniform wear
- High mileage and resistance to vehicle irregularities

AVAILABLE SIZES:

9.00R20, 11.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
9.00R20	14	7.00	1015	258	13.5	K(110)	141/139	2575	2430	790
9.00R20	16	7.00	1015	258	13.5	K(110)	142/140	2650	2500	830
11.00R20	16	8.00	1079	290	14.0	K(110)	150/147	3350	3075	830



JETWAY JUH3+

SALIENT FEATURES

- Wider shoulder ribs
- Twisted geometry
- Unique groove design
- Construction
- Superior tread compound

BENEFITS

- For even wear characteristics and reducing lateral forces
- For better directional stability
- For excellent heat dissipation
- New belt pack for least buzz out & multiple retreads
- High wear resistant, low RR

AVAILABLE SIZES:

8.25R20, 10.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
8.25R20	14	6.50	964	230	12.0	K(110)	136/134	2240	2120	830
8.25R20	16	6.50	964	230	12.0	K(110)	137/135	2300	2180	860
10.00R20	16	7.50	1049	278	14.0	K(110)	146/143	3000	2725	830



JETWAY JUH4

SALIENT FEATURES

- 5 rib tread design
- Micro sipes
- Stone ejectors
- Robust casing
- Tread compound

BENEFITS

- For better vehicle handling and directional stability
- To prevent channel/river wear
- For preventing casing from damage
- For longer tyre life and multiple retreads
- High wear resistant

AVAILABLE SIZES:

11.00R20, 11.00R22

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11.00R20	16	8.00	1081	290	16.0	K(110)	150/147	3350	3075	830
11.00R22	16	8.00	1135	292	16.0	K(110)	152/149	3550	3250	830



JETWAY JUH5

SALIENT FEATURES

- Straight groove design
- Trendy and unique lateral sipe design
- Higher tread depth
- Wider tread surface
- Tread compound

BENEFITS

- For better vehicle handling
- For extra traction and improved grip on wet surfaces
- For extra initial mileage
- For optimum pressure distribution
- Better wear characteristics & low RR

AVAILABLE SIZES:

8.25R20, 7.50R20, 9.00R20, 10.00R20, 255/80R22.5, 11R22.5, 11.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
8.25R20	16	6.50	968	230	14.0	K(110)	137/135	2300	2180	860
9.00R20	14	7.00	1019	258	15.5	K(110)	141/139	2575	2430	790
9.00R20	16	7.00	1019	258	15.5	K(110)	142/140	2650	2500	830
10.00R20	16	7.50	1054	282	16.5	K(110)	146/143	3000	2725	830
255/80R22.5	-	7.50	981	253	14.5	J(100)	145/142	2900	2650	900
11R22.5	16	8.25	1054	282	16.5	L(120)	146/143	3000	2725	830
11R22.5	16	8.25	1054	282	16.5	L(120)	148/145	3150	2900	850
11.00R20	16	8.00	1084	296	16.5	K(110)	150/147	3350	3075	830
7.50R20	14	6.00	935	215	13.5	K(110)	130/128	1900	1800	830



JETWAY JUH6

SALIENT FEATURES

- Wide and high tread depth
- Wide shoulder rib
- Zig-zag groove with unique lateral sipe
- Premium tread compound

AVAILABLE SIZES:

385/65R22.5, 13R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
385/65R22.5	20	11.75	1073	392	16.0	K(110)	164	5000	-	900
13R22.5	18	9.75	1121	321	17.0	K(110)	156/150	4000	3350	875

BENEFITS

- High initial tread mileage
- Uniform shoulder wear and even pressure distribution
- Better traction & grip at wet surface
- Better wear resistance and cut chip performance



JETWAY JUX

SALIENT FEATURES

- Straight rib design
- Wider shoulders
- Diamond shape stone ejectors
- Low rolling resistance
- Superior tread compound

AVAILABLE SIZES:

11R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11R22.5	16	8.25	1057	281	17.5	J(100)	148/145	3150	2900	850

BENEFITS

- Direction stability and high heat dissipation
- Uniform wear during turning and cornering
- Ease in ejection of stone due to diamond geometry
- Maximum fuel saving
- High wear resistance



JETWAY JUX+

SALIENT FEATURES

- 5 straight rib design
- Wider shoulders
- Diamond shape stone ejectors
- Low rolling resistance
- Superior tread compound

BENEFITS

- Direction stability and high heat dissipation
- Uniform wear during turning and cornering
- Ease in ejection of stone due to diamond geometry
- Maximum fuel saving
- High wear resistance

AVAILABLE SIZES:

295/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
295/80R22.5	16	8.25	1059	294	18.5	M (130)	152/148	3550	3150	850
295/80R22.5	16	8.25	1059	294	18.5	J (100)	152/148	3550	3150	850



JETWAY JUL2

SALIENT FEATURES

- 5 Rib pattern design
- Wider shoulder ribs
- New multiple sipe geometry & micro sipes
- Multiple stone ejector in the center of grooves
- Tread compound

BENEFITS

- For better directional stability and low rolling resistance
- For uniform wear during cornering and superior grip
- For better traction in new tyres & to prevent channel/river wear
- To reduce stone entrapment, resulting in reduced chunking
- For higher mileage and cooler running

AVAILABLE SIZES:

275/80R22.5, 12R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
275/80R22.5	16	8.25	1028	277	16.0	L(120)	149/146	3250	3000	850
275/80R22.5	-	8.25	1028	277	16.0	J(100)	151/148	3450	3150	900
12R22.5	16	9.00	1084	293	16.0	L(120)	152/148	3550	3150	850



JETWAY JUL2+

SALIENT FEATURES

- 5 Rib pattern design
- Wider shoulder ribs
- New multiple sipe geometry and micro sipes
- Multiple stone ejector in the center of grooves
- De-coupling groove
- Tread compound

BENEFITS

- For better directional stability and low rolling resistance
- For uniform wear during cornering and superior grip
- For better traction in new tyres and to prevent channel/river wear
- To reduce stone entrapment, resulting in reduced chunking
- For even shoulder wear
- For higher mileage and cooler running

AVAILABLE SIZES:

11R22.5, 295/75R22.5, 11R24.5, 285/75R24.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11R22.5	16	8.25	1052	282	15.0	L(120)	146/143	3000	2725	830
11R22.5	14	8.25	1052	282	15.0	M(130)	144/142	2800	2650	720
295/75R22.5	14	9.00	1017	292	14.0	M(130)	144/141	2800	2575	760
11R24.5	16	8.25	1101	280	15.0	L(120)	149/146	3250	3000	830
11R24.5	14	8.25	1101	280	15.0	M(130)	146/143	3000	2725	720
285/75R24.5	14	8.25	1053	286	15.0	M(130)	144/141	2800	2575	760
285/75R24.5	16	8.25	1053	286	15.0	L(120)	147/144	3075	2800	830



JETWAY JUL3

SALIENT FEATURES

- New multiple 3D sipe geometry & micro sipes
- Straight ribs
- Wide shoulder ribs
- Multiple stone ejector in the center of grooves

BENEFITS

- For better traction in new tyres & even wear
- Better directional stability
- Even wear while cornering
- To reduce stone entrapment, resulting in reduced chunking

AVAILABLE SIZES:

11R22.5, 295/75R22.5, 295/80R22.5, 315/80R22.5, 11R24.5, 285/75R24.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11R22.5	16	8.25	1056	285	17.3	L(120)	146/143	3000	2725	830
295/75R22.5	16	9.00	1019	292	15.0	L(120)	146/143	3000	2725	830
295/75R22.5	14	9.00	1019	292	15.0	M(130)	144/141	2800	2575	760
295/80R22.5	16	8.25	1056	297	17.3	M(130)	152/148	3550	3150	850
295/80R22.5	16	8.25	1056	297	17.3	M(130)	154/149	3750	3250	850
315/80R22.5	18	9.00	1080	315	17.3	M(130)	156/150	4000	3350	850
11R24.5	16	8.25	1106	285	17.3	L(120)	149/146	3250	3000	830
285/75R24.5	16	8.25	1053	278	15.0	L(120)	147/144	3075	2800	830
285/75R24.5	14	8.25	1053	278	15.0	M(130)	144/141	2800	2575	760



JETWAY JUL4

SALIENT FEATURES

- 5 Rib pattern design
- Wide shoulder ribs
- Innovative 3D and micro sipe design
- Twisted flank angles
- Tread compound

BENEFITS

- For better directional stability and low rolling resistance
- Help resist tearing and accelerated wear in high scrub application
- For improved traction and superior wear characteristics
- To reduce stone entrapment
- For higher mileage and cooler running

AVAILABLE SIZES:

315/70R22.5, 315/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
315/70R22.5	18	9.00	1014	312	14.0	L(120)	156/150	4000	3350	900
315/80R22.5	18	9.00	1075	307	15.0	L(120)	156/150	4000	3350	850



JETWAY JUM

SALIENT FEATURES

- 5 straight rib design
- Wide shoulders
- Diamond shape stone ejectors
- New sipe design
- Special tread compound

BENEFITS

- Better direction stability and low rolling resistance
- For better lateral stability
- Ease in ejection of stone from diamond geometry
- To arrest initial irregular wear
- High wear resistance and maximum fuel saving

AVAILABLE SIZES:

295/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
295/80R22.5	16	8.25	1052	294	15.3	M(130)	154/149	3750	3250	850



JETWAY JUM XM

SALIENT FEATURES

- 4 Rib design with twisted central ribs
- Wide shoulder ribs
- Stress relieving sipes
- Straight groove at shoulder
- New tread compound

BENEFITS

- Reduced block shuffling and stone entrapment
- Better lateral stability
- Uniform wear
- Good directional stability
- Provides low RRC & enhanced mileage

AVAILABLE SIZES:

295/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
295/80R22.5	16	8.25	1052	294	15.3	M(130)	152/148	3550	3150	850



JETWAY JUC

SALIENT FEATURES

- Optimized land-sea distribution
- Conventional radial semi-lug pattern
- Long pitches with slight bends and lateral grooves
- Optimum under tread rubber
- Deep buttress window

BENEFITS

- Good mileage with smooth wear
- Premium performance on radial tyres on all wheels
- Aggressive looks with smooth wear
- Multiple retreads
- For better cooling

AVAILABLE SIZES:

10.00R20, 11R22.5, 11R24.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
10.00R20	16	7.50	1052	282	16.5	K(110)	146/143	3000	2725	830
11R22.5	16	8.25	1052	281	16.5	L(120)	148/145	3150	2900	850
11R24.5	16	8.25	1105	283	16.5	L(120)	149/146	3250	3000	830



JETWAY JUC-XM

SALIENT FEATURES

- Wide shoulder ribs
- Developed flank angles with Zig-zag groove
- Improved version of typical semi lug pattern
- Extreme block angle

BENEFITS

- Better directional stability
- Enhance block rigidity results in Uniform wear
- Making it suitable for both Steer & drive application
- Making it suitable for Mixed application

AVAILABLE SIZES:

295/80R22.5, 11.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
295/80R22.5	16	8.25	1053	294	17.3	M(130)	152/148	3550	3150	850
295/80R22.5	16	8.25	1053	294	17.3	M(130)	154/149	3750	3250	850
11.00R20	16	8.00	1087	290	10.0	K(110)	150/147	3350	3075	830



JETWAY JUC2

SALIENT FEATURES

- Wider lateral grooves
- Wider crown and shoulder ribs
- Unique groove geometry
- Construction design

BENEFITS

- Better traction
- High direction stability and uniform tread wear
- No stone entrapment
- Higher retread
- Superb structural durability

AVAILABLE SIZES:

9.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
9.00R20	16	7.00	1020	258	16.0	K(110)	142/140	2650	2500	830



JETWAY JUC3

SALIENT FEATURES

- Rugged pattern design
- Wider crown and shoulder ribs
- Zig-zag groove geometry
- Open buttress design and scooped notch at shoulder
- Flexed rib support between ribs

BENEFITS

- Better traction
- High direction stability and uniform tread wear
- No stone entrapment
- Reduced heat development at shoulder
- Helps in circumferential flexing of ribs

AVAILABLE SIZES:

10.00R20, 11.00R20, 12R22.5, 315/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
10.00R20	16	7.50	1065	281	18.0	K(110)	146/143	3000	2725	830
10.00R20	18	7.50	1065	281	18.0	K(110)	149/146	3250	3000	930
11.00R20	16	8.00	1087	296	18.0	K(110)	150/147	3350	3075	830
12R22.5	16	9.00	1086	298	18.0	L(120)	152/148	3550	3150	850
315/80R22.5	18	9.00	1084	308	18.0	M(130)	156/150	4000	3350	850



JETWAY JUC3+

SALIENT FEATURES

- Closed shoulder design
- Innovative lateral groove design
- Unique twisted groove geometry
- Open buttress design and scooped notch at shoulder
- Exclusive tread compound

BENEFITS

- For improved handling and stability
- Provides excellent traction and braking
- Prevents stone entrapment
- Reduced heat development at shoulder
- Superior resistance against cutting and chipping

AVAILABLE SIZES:

11.00R20, 12.00R24, 325/95R24, 12R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11.00R20	16	8.00	1083	290	16.0	K(110)	150/147	3350	3075	830
12.00R24	20	8.50	1213	314	13.5	K(110)	160/156	4500	4000	850
325/95R24	22	8.50	1213	314	13.5	K(110)	162/160	4750	4500	850
12R22.5	16	9.00	1083	300	15.5	L(120)	152/148	3550	3150	850



JETWAY JUC4

SALIENT FEATURES

- Rugged pattern design
- Wider shoulder ribs
- Robust structural design
- Open buttress design and scooped notch at shoulder
- Exclusive tread compound

BENEFITS

- Better traction
- High direction stability and uniform tread wear
- For multiple retreads
- Reduced heat development
- Superior resistance against cutting and chipping

AVAILABLE SIZES:

11.00R20, 12.00R20, 12.00R24, 325/95R24, 13R22.5, 315/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11.00R20	16	8.00	1088	290	17.0	L(120)	150/146	3350	3000	825
12.00R20	18	8.50	1123	305	17.0	L(120)	154/151	3750	3450	830
12.00R24	20	8.50	1225	312	16.0	K(110)	160/156	4500	4000	850
325/95R24	22	8.50	1225	312	16.0	K(110)	162/160	4750	4500	850
13R22.5	18	9.75	1122	309	17.0	K(110)	156/150	4000	3350	875
315/80R22.5	18	9.00	1077	312	16.0	L(120)	156/150	4000	3350	850



JETWAY JUC5

SALIENT FEATURES

- Wide shoulder design
- Innovative lateral groove design
- Unique twisted groove Geometry
- Scooped notch at Buttress
- Exclusive tread compound

BENEFITS

- For improved handling and stability
- Provides excellent traction and braking
- Prevents stone entrapment
- Reduced heat development at shoulder
- Superior resistance against cutting and chipping

AVAILABLE SIZES:

12.00R24, 325/95R24

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
12.00R24	20	8.50	1217	314	15.0	K(110)	160/156	4500	4000	850
325/95R24	22	8.50	1217	314	15.0	K(110)	162/160	4750	4500	850



JETWAY JUC-XD

SALIENT FEATURES

- Wide and deep tread
- Open shoulder rugged pattern design
- Rigid circumferential tie bars
- Specially designed compound

BENEFITS

- Better pressure distribution & high initial mileage
- Better traction and heat dissipation
- Restrict the block shuffle, leading to uniform wear
- Better cut and chip resistance

AVAILABLE SIZES:

385/65R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
385/65R22.5	20	11.75	1078	377	18.3	K(110)	164	5000	-	900



JETSTEEL JDL XM

SALIENT FEATURES

- 4 block design with wide tread surface
- High tread depth
- Wide opening windows
- Special tread compound

BENEFITS

- Better pressure distribution
- Higher initial tread mileage
- Cooler running in long haulage application
- Low RRC & high mileage

AVAILABLE SIZES:

255/80R22.5, 295/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
255/80R22.5	-	7.50	985	253	17.0	J(100)	145/142	2900	2650	900
295/80R22.5	16	8.25	1058	294	20.0	M(130)	152/148	3550	3150	850



JETSTEEL JDL2

SALIENT FEATURES

- Extra deep tread
- Closed shoulder
- Higher void ratio
- Wider lateral grooves
- Solid tie bar between blocks

BENEFITS

- Higher initial mileage
- Better directional stability for extra long haul application
- Better heat dissipation in long run
- Better traction and braking properties
- Extra strength and increased rigidity of blocks

AVAILABLE SIZES:

295/75R22.5, 11R22.5, 285/75R24.5, 11R24.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
295/75R22.5	14	9.00	1039	286	25.0	M(130)	144/141	2800	2575	760
11R22.5	16	8.25	1072	285	25.0	L(120)	146/143	3000	2725	830
285/75R24.5	14	8.25	1073	285	25.0	M(130)	144/141	2800	2575	760
285/75R24.5	16	8.25	1073	285	25.0	L(120)	147/144	3075	2800	830
11R24.5	16	8.25	1122	285	25.0	L(120)	149/146	3250	3000	830



JETSTEEL JDL3

SALIENT FEATURES

- Wide tread surface with 6 block design
- Innovative 3D void generating sipes
- Twisted block flank surface
- Interblock tie bars

BENEFITS

- For superior pressure distribution
- Prevents irregular wear and improves wet performance throughout the life
- For preventing stone entrapment and improving casing durability
- Improved stiffness promoting outstanding driving performance

AVAILABLE SIZES:

295/60R22.5, 295/80R22.5, 315/60R22.5, 315/70R22.5, 315/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
295/60R22.5	18	9.00	928	293	18.0	L(120)	150/147	3350	3075	900
295/80R22.5	16	9.00	1062	295	20.2	M(130)	154/149	3750	3250	850
315/60R22.5	20	9.75	960	313	16.5	L(120)	152/148	3550	3150	900
315/70R22.5	18	9.00	1023	312	18.0	L(120)	154/150	3750	3350	900
315/80R22.5	18	9.00	1085	307	18.0	L(120)	156/150	4000	3350	850



JETSTEEL JDH

SALIENT FEATURES

- 3 groove block design
- Wider lateral grooves
- Wider crown and shoulder blocks
- Solid block design

BENEFITS

- Uniform pressure distribution
- Better traction and braking properties
- High directional stability and even/smooth wear
- Excellent mileage at recommended loads

AVAILABLE SIZES:

9.00R20, 11.00R20, 11R22.5, 11R24.5, 275/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
9.00R20	16	7.00	1020	258	16.7	K(110)	142/140	2650	2500	830
11.00R20	16	8.00	1089	290	19.0	K(110)	150/147	3350	3075	830
11R22.5	16	8.25	1062	281	18.9	L(120)	148/145	3150	2900	850
11R24.5	16	8.25	1114	283	20.4	L(120)	149/146	3250	3000	830
275/80R22.5	16	8.25	1023	267	17.0	L(120)	149/146	3250	3000	850



JETSTEEL JDH3

SALIENT FEATURES

- 3 groove block design
- Wide lateral grooves
- Wide crown and shoulder blocks
- Window in shoulder blocks
- Superior tread compound

BENEFITS

- Uniform pressure distribution
- Better traction and braking efficiency
- High directional stability and even/smooth wear
- Enables cooler running of tyres
- Excellent cut and chip resistance

AVAILABLE SIZES:

8.25R20, 10.00R20, 11.00R22, 12R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
8.25R20	14	6.50	973	230	16.5	K(110)	136/134	2240	2120	830
8.25R20	16	6.50	973	230	16.5	K(110)	137/135	2300	2180	860
10.00R20	16	7.50	1056	282	18.0	K(110)	146/143	3000	2725	830
11.00R22	16	8.00	1141	292	19.0	K(110)	152/149	3550	3250	830
12R22.5	16	9.00	1087	298	19.0	L(120)	152/148	3550	3150	850



JETSTEEL JDH5+

SALIENT FEATURES

- Robust tread blocks
- Open shoulder design
- High tread depth
- Unique sipe design
- Special tread compound

BENEFITS

- For excellent traction, braking and uniform pressure distribution
- Excellent traction and heat dissipation
- Higher initial tyre mileage
- Improved wet traction and grip
- Excellent abrasion resistance & fuel economy

AVAILABLE SIZES:

11R22.5, 11R24.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11R22.5	16	8.25	1065	285	21.5	L(120)	146/143	3000	2725	830
11R24.5	16	8.25	1117	285	21.5	L(120)	149/146	3250	3000	830



JETSTEEL JDH6

SALIENT FEATURES

- 6 block tread design
- Wide center blocks
- Open shoulder design
- High strength steel belts
- Special tread compound

BENEFITS

- Excellent pressure distribution
- Good ground contact resulting in smooth wear
- Better traction and cooler running
- Very good carcass strength
- Excellent abrasion resistance & fuel economy

AVAILABLE SIZES:

295/80R22.5, 315/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
295/80R22.5	16	8.25	1070	292	23.5	M(130)	152/148	3550	3150	850
315/80R22.5	18	9.00	1097	320	23.5	M(130)	156/150	4000	3350	850



JETSTEEL JDE++

SALIENT FEATURES

- Optimized footprint with robust tread blocks
- Wider lateral grooves
- Open shoulder design
- Superior tread compound
- Large air envelope

BENEFITS

- Excellent pressure distribution for all load application
- Better traction and braking properties
- For better heat dissipation
- Excellent cut and chip resistance
- Extra-load carrying capacity

AVAILABLE SIZES:

8.25R20, 9.00R20, 10.00R20, 11.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
8.25R20	16	6.50	979	243	17.5	K(110)	137/135	2300	2180	860
9.00R20	16	7.00	1027	258	18.0	K(110)	142/140	2650	2500	830
10.00R20	16	7.50	1066	282	19.0	K(110)	146/143	3000	2725	830
10.00R20	18	7.50	1066	282	19.0	K(110)	149/146	3250	3000	930
11.00R20	16	8.00	1090	290	20.0	K(110)	150/147	3350	3075	830



JETSTEEL JDE_{INA}

SALIENT FEATURES

- Optimized footprint with robust tread blocks
- Wider lateral grooves
- Open shoulder design
- Superior tread compound
- Large air envelope

BENEFITS

- Excellent pressure distribution for all load application
- Better traction and braking properties
- For better heat dissipation
- Excellent cut and chip resistance
- Extra-load carrying capacity

AVAILABLE SIZES:

10.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
10.00R20	16	7.50	1066	282	19.0	K(110)	146/143	3000	2725	830



JETSTEEL JDC

SALIENT FEATURES

- Robust non-directional tread blocks
- Open shoulder design
- Solid tie bars between blocks
- Higher tread depth

BENEFITS

- Better vehicle handling, excellent traction in both on/off road conditions
- Enhanced traction and runs cooler
- Extra strength and block rigidity
- Higher mileage

AVAILABLE SIZES:

12.00R20, 13R22.5, 11R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
12.00R20	18	8.50	1127	315	20.8	K(110)	154/151	3750	3450	830
13R22.5	18	9.00	1128	322	21.0	K(110)	156/150	4000	3350	875
11R22.5	16	8.25	1060	282	19.0	L(120)	148/145	3150	2900	850



JETSTEEL JDC XD

SALIENT FEATURES

- Zig-zag groove design
- Solid shoulder tie bar
- High non-skid depth
- Special compound

BENEFITS

- Provide better traction
- Reduced block shuffling at higher loads
- Provides high initial mileage
- High mileage & resistance to cut & chip

AVAILABLE SIZES:

12R22.5, 11.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
12R22.5	16	9.00	1093	293	20.5	L(120)	152/148	3550	3150	850
11.00R20	16	8.00	1092	290	20.5	K (110)	150/147	3350	3075	830



JETSTEEL JDC3

SALIENT FEATURES

- Wide tread surface with 6 block design
- Innovative 3D void generating sipes
- Twisted block flank surface
- Interblock tie bars

BENEFITS

- For superior pressure distribution
- Prevents irregular wear and improves wet performance throughout the life
- For preventing stone entrapment and improving casing durability
- Improved stiffness promoting outstanding driving performance

AVAILABLE SIZES:

10.00R20, 11.00R20, 12R22.5, 295/80R22.5, 315/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
10.00R20	16	7.50	1069	282	20.0	K(110)	146/143	3000	2725	830
11.00R20	16	8.00	1092	290	20.5	K(110)	150/147	3350	3075	830
12R22.5	16	9.00	1091	300	20.5	L(120)	152/148	3550	3150	850
295/80R22.5	16	8.25	1069	297	20.0	K(110)	152/148	3550	3150	850
315/80R22.5	18	9.00	1095	320	22.5	K(110)	156/150	4000	3350	850



JETSTEEL JDC5

SALIENT FEATURES

- 5 block open shoulder design
- Rotating flank angles and stone ejectors
- Full width top belt
- New bead design
- Special tread compound

BENEFITS

- Excellent traction in all conditions and helps in cooler running
- Ease in stone ejection
- Prevents stone penetration in off road conditions
- Superior durability
- Resistant to chip and cuts, better wear characteristics

AVAILABLE SIZES:

11R22.5, 11R24.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11R22.5	16	8.25	1073	298	25.5	K(110)	146/143	3000	2725	830
11R24.5	16	8.25	1123	298	25.5	K(110)	149/146	3250	3000	830



JETSTEEL JDO XD

SALIENT FEATURES

- Continuous groove design
- Open shoulder design
- Solid tie-bars between blocks
- Mining tread compound

BENEFITS

- For good traction in mining application
- Extra traction in off the road conditions
- Extra strength and block rigidity
- For lower tread chipping and very good cut resistance

AVAILABLE SIZES:

10.00R20, 11.00R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
10.00R20	16	7.50	1058	280	19.5	K(110)	146/143	3000	2725	830
11.00R20	16	8.00	1087	290	18.0	K(110)	150/147	3350	3075	830



JETWAY JTH1

SALIENT FEATURES

- 5 straight rib pattern
- Unique groove design
- Construction design

BENEFITS

- Better directional stability and low rolling resistance
- Less stone entrapment
- High retread factor
- High initial mileage & low rolling resistance

AVAILABLE SIZES:

255/70R22.5, 275/70R22.5, 11R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
255/70R22.5	16	7.50	930	256	13.5	M(130)	140/137	2500	2300	830
275/70R22.5	16	8.25	960	276	14.0	L(120)	148/145	3150	2900	900
11R22.5	16	8.25	1047	286	13.0	L(120)	148/145	3150	2900	850



JETWAY JTH_{SD}

SALIENT FEATURES

- De-coupling groove at shoulder
- Shallow tread depth
- 4 circumferential grooves
- Optimum tread design
- Specially designed tread compound

BENEFITS

- Combats irregular shoulder wear
- Resist rib twist resulting in lower rolling resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensures even wear in trailer axle position
- High initial mileage and better fuel economy

AVAILABLE SIZES:

11R22.5, 295/75R22.5, 11R24.5, 285/75R24.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
11R22.5	14	8.25	1042	286	11.2	L(120)	144/142	2800	2650	720
11R22.5	16	8.25	1042	286	11.2	L(120)	146/143	3000	2725	830
295/75R22.5	14	9.00	1008	297	11.2	L(120)	144/141	2800	2575	760
295/75R22.5	16	9.00	1008	297	11.2	L(120)	146/143	3000	2725	830
11R24.5	14	8.25	1092	283	11.2	L(120)	146/143	3000	2725	725
11R24.5	16	8.25	1092	283	11.2	L(120)	149/146	3250	3000	830
285/75R24.5	14	8.25	1040	288	11.2	L(120)	144/141	2800	2575	760
285/75R24.5	16	8.25	1040	288	11.2	L(120)	147/144	3075	2800	830



JETWAY JTL

SALIENT FEATURES

- 5 straight rib design
- Twisted groove design
- Unique sipe design
- Optimum tread design
- Specially designed tread compound

BENEFITS

- For better directional stability and low rolling resistance
- For less stone entrapment
- For better traction
- Ensures even wear in trailer axle position
- High initial mileage and better fuel economy

AVAILABLE SIZES:

385/55R22.5, 385/65R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
385/55R22.5	20	12.25	999	374	14.3	K(110)	160	4500	-	900
385/65R22.5	20	11.75	1072	377	15.0	K(110)	160	4500	-	900



JETWAY JUX

SALIENT FEATURES

- Closely packed center
- Wider shoulders rib
- Unique sipe design and pattern
- Unique noise fence design
- Robust kerb rib design at buttress

BENEFITS

- Track for enhanced mileage and energy efficiency
- For higher lateral stiffness
- For lower noise
- For lowering pipe resonance effect
- For protection against sidewall damages

AVAILABLE SIZES:

215/75R17.5, 225/75R17.5, 235/75R17.5, 245/70R17.5, 255/70R22.5, 275/70R22.5, 295/80R22.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
215/75R17.5	14	6.00	775.0 ± 4.0	213.0 ± 5.0	12.5 ± 0.5	M(130)	126/124	1700	1600	102
225/75R17.5	14	6.75	787.0 ± 4.0	224.0 ± 5.0	14.0 ± 0.5	M(130)	129/127	1850	1750	105
235/75R17.5	14	6.75	799.0 ± 4.0	235.0 ± 5.0	14.0 ± 0.5	M(130)	132/130	2000	1900	112
245/70R17.5	16	7.50	799.0 ± 4.0	250.0 ± 5.0	14.5 ± 0.5	M(130)	136/134	2240	2120	123
255/70R22.5	16	7.50	932.0 ± 4.0	255.0 ± 5.0	16.0 ± 0.5	M(130)	140/137	2500	2300	120
275/70R22.5	16	8.25	966.0 ± 4.0	270.0 ± 5.0	18.5 ± 0.5	J(100)	150/148	3350	3150	130
295/80R22.5	16	8.25	1053.0 ± 4.0	297.0 ± 5.0	18.0 ± 0.5	J(100)	154/149	3750	3250	123



JETSTEEL JDE XF

SALIENT FEATURES

- Interconnecting tie bars at centre at shoulder
- Specially engineered tread compound
- 4 block design
- Straight groove design
- Best suit

BENEFITS

- To increase block stiffness that in turn improves wear
- For high mileage and better efficiency
- For even pressure distribution
- For better directional stability
- For long haulage application with better fuel economy

AVAILABLE SIZES:

215/75R17.5, 225/75R17.5, 235/75R17.5, 295/90R20

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
215/75R17.5	14	6.00	780	216	15	M(130)	126/124	1700	1600	700
225/75R17.5	14	6.75	788	227	15	M(130)	129/127	1850	1750	725
235/75R17.5	14	6.75	802	235	15.5	M(130)	132/130	2000	1900	775
295/90R20	-	7.50	1062	282	17.2	J(130)	152/148	3550	3150	850



JETSTEEL JDO XD

SALIENT FEATURES

- Aggressive multi-lug design
- Open shoulder design
- Interblock tie-bars
- Unique stepped groove design
- Mining tread compound

BENEFITS

- For excellent traction and even wear
- Offers superior self-cleaning capability
- Guarantees even wear and outstanding driving performance
- Prevents stone entrapment
- For lower tread chipping and very good cut resistance

AVAILABLE SIZES:

12.00R24

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
12.00R24	18	8.50	1253	314	30.0	F(80)	158/155	4250	3875	830



LIGHT TRUCK RADIAL



LIGHT TRUCK RADIAL



JETWAY JUH5



JETWAY JUL3



JETWAY JUL4



JETWAY JUC



JETWAY JUS



JETWAY JUZ



JETSTEEL JDL XM



JETSTEEL JDH5



JETSTEEL JDL3+



STEEL KING



STEEL KING +



JUH STEEL



SAND CUM HIGHWAY



ULTIMA XPC1



JETWAY JUH5

SALIENT FEATURES

- Straight groove design
- Trendy and unique lateral sipe design
- Higher tread depth
- Wider tread surface
- Tread compound

BENEFITS

- For better vehicle handling
- For extra traction and improved grip on wet surfaces
- For extra initial mileage
- For optimum pressure distribution
- Better wear characteristics and low RR

AVAILABLE SIZES:

235/75R17.5, 245/70R17.5, 10R17.5, 7.00R16, 7.50R16, 8.25R16

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
235/75R17.5	14	6.75	800	234	15.0	M(130)	132/130	2000	1900	775
235/75R17.5	18	6.75	800	234	15.0	J(100)	143/141	2725	2575	865
245/70R17.5	16	7.50	794	253	12.5	M(130)	136/134	2240	2120	850
245/70R17.5	18	7.50	794	253	12.5	J(100)	143/141	2725	2575	875
10R17.5	16	7.50	862	254	13.0	M(130)	134/132	2120	2000	800
7.00R16	12	5.50	782	202	10.3	M(130)	115/110	1215	1060	655
7.00R16	14	5.50	782	202	10.3	M(130)	118/113	1320	1150	725
7.50R16	16	6.00	808	216	12.0	M(130)	124/120	1600	1400	795
8.25R16	16	6.00	852	234	12.5	M(130)	129/127	1850	1750	795



JETWAY JUL3

SALIENT FEATURES

- New multiple 3D sipe geometry & micro sipes
- Straight ribs
- Wide shoulder ribs
- Multiple stone ejector in the center of grooves

BENEFITS

- For better traction in new tyres & even wear
- Better directional stability
- Even wear while cornering
- To reduce stone entrapment, resulting in reduced chunking

AVAILABLE SIZES:

7.50R16, 8.25R16, 9.5R17.5, 9.5R17.5FRT, 215/75R17.5, 215/75R17.5FRT, 225/75R17.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
7.50R16	14	6.00	809	215	12.0	M(130)	122/121	1500	1450	690
7.50R16	16	6.00	809	215	12.0	M(130)	124/120	1600	1400	795
8.25R16	16	6.00	852	234	12.5	M(130)	129/127	1850	1750	795
9.5R17.5	14	6.75	843	235	13.0	M(130)	129/127	1850	1750	750
9.5R17.5FRT	16	6.75	843	235	13.0	L(120)	139/137	2430	2300	825
9.5R17.5FRT	18	6.75	843	235	13.0	K(110)	143/141	2725	2575	875
215/75R17.5	14	6.00	775	213	12.5	M(130)	126/124	1700	1600	700
215/75R17.5FRT	16	6.00	775	213	12.5	J(100)	135/133	2180	2060	850
225/75R17.5	14	6.75	786	224	13.5	M(130)	129/127	1850	1750	725



JETWAY JUL4

SALIENT FEATURES

- 5 rib pattern design
- Wide shoulder ribs
- Innovative 3D and micro sipe design
- Twisted flank angles
- Tread compound

BENEFITS

- For better directional stability and low rolling resistance
- Help resist tearing and accelerated wear in high scrub application
- For improved traction and superior wear characteristics
- To reduce stone entrapment
- For higher mileage and cooler running

AVAILABLE SIZES:

225/70R19.5, 245/70R19.5, 265/70R19.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
225/70R19.5	14	6.75	810	225	13.5	L(120)	128/126	1800	1700	760
245/70R19.5	16	7.50	835	245	13.5	M(130)	136/134	2240	2120	830
265/70R19.5	16	7.50	866	257	13.5	M(130)	140/138	2500	2360	775



JETWAY JUC

SALIENT FEATURES

- Optimized land-sea distribution
- Conventional radial semi-lug pattern
- Long pitches with slight bends and lateral grooves
- Optimum under tread rubber
- Deep buttress window

BENEFITS

- Good mileage with smooth wear
- Premium performance on radial tyres on all wheels
- Aggressive looks with smooth wear
- Multiple retreads
- For better cooling

AVAILABLE SIZES:

7.50R16

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
7.50R16	14	6.00	809	209	12.0	M(130)	122/121	1500	1450	690



JETWAY JUS

SALIENT FEATURES

- Aggressive tread pattern
- Extracted tread/lug
- Stepped grooves

BENEFITS

- To provide extra traction in off-road
- Improves self cleaning in soft soils
- For better flotation in sand application

AVAILABLE SIZES:

10R17.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
10R17.5	16	7.50	868	254	15.5	K(110)	134/132	2120	2000	800



JETWAY JUZ

SALIENT FEATURES

- Unique tread pattern with dual size tread blocks
- Higher void ratio
- Special tread compound

BENEFITS

- Helps in better traction
- For better stability in mud and sludge roads
- To improve wear and cracks

AVAILABLE SIZES:

10R17.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
10R17.5	16	7.50	868	254	15.5	K(110)	134/132	2120	2000	800



JETSTEEL JDL XM

SALIENT FEATURES

- 4 block design with wide tread surface
- Open shoulder design
- Uniform pressure distribution
- Unique sipe design
- Premium blended rubber compound

BENEFITS

- Better pressure distribution and higher mileage
- Runs cooler at high speed for longer duration
- Reduced irregular wear and enhanced mileage
- Lower rolling resistance

AVAILABLE SIZES:

245/70R17.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
245/70R17.5	16	7.50	800	253	14.7	M(130)	136/134	2240	2120	850



JETSTEEL JDH5

SALIENT FEATURES

- Robust tread blocks
- Wide lateral groove
- High tread depth
- High strength steel belts
- Special tread compound

BENEFITS

- Excellent contact patch
- Excellent traction and heat dissipation
- Very good tyre life
- Very good carcass strength
- Excellent abrasion resistance and fuel economy

AVAILABLE SIZES:

7.50R16, 8.25R16, 215/75R17.5, 225/75R17.5, 235/75R17.5,

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
7.50R16	14	6.00	813	216	14.5	M(130)	122/121	1500	1450	690
7.50R16	16	6.00	813	216	14.5	M(130)	124/120	1600	1400	795
8.25R16	16	6.00	857	234	15.0	M(130)	129/127	1850	1750	795
215/75R17.5	14	6.00	782	213	15.0	M(130)	126/124	1700	1600	700
225/75R17.5	14	6.75	792	224	15.5	M(130)	129/127	1850	1750	725
235/75R17.5	14	6.75	805	235	16.5	M(130)	132/130	2000	1900	775



JETSTEEL JDL3+

SALIENT FEATURES

- Wide tread surface with 6 block unique pattern design
- Wide centre track
- Unique sipe design
- Inter-block Tie bars
- Special tread compound

BENEFITS

- Provides superior pressure distribution and good traction
- Good ground contact resulting in smooth wear
- Better wet traction and grip
- Improved stiffness promoting outstanding driving performance
- Provides high Initial mileage

AVAILABLE SIZES:

225/70R19.5, 245/70R19.5

TYRE SIZE	PLY RATING	RIM WIDTH (INCH)	UNLOADED INFLATED TYRE DIMENSIONS			SPEED (KMPH)	LOAD INDEX	MAX. LOAD CARRYING CAPACITY		
			OVERALL DIAMETER (MM)	SECTION WIDTH (MM)	TREAD DEPTH (MM)			SINGLE (KG)	DUAL (KG)	IP (KPA)
225/70R19.5	14	6.75	817	224	16.7	L(120)	128/126	1800	1700	760
245/70R19.5	16	7.50	841	246	16.7	M(130)	136/134	2240	2120	830



STEEL KING

SALIENT FEATURES

- Tension optimised contour ply with robust belt package
- Specially designed bottomed rib tyre
- New gen reinforced material
- Larger mass tread blocks

BENEFITS

- Excellent contact patch
- Excellent traction and heat dissipation
- Very good tyre life
- Very good carcass strength
- Excellent abrasion resistance & fuel economy

AVAILABLE SIZES:

7.00R15, 7.50R16, 215/75R15LT

TYRE SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
7.00R15	N	140	110/105	NA	5.50	80	749	207
7.00R16	N	140	115/110	NA	5.50	95	778	200
7.50R16	M	130	122/118	NA	6.00	105	807	219
215/75R15LT	S	180	115/113	NA	6.00	87	704	209



STEEL KING +

SALIENT FEATURES

- Symmetric pattern design
- Variable sipes
- Circumferential grooves with fillets
- Shoulder tie bars
- Variable depth sipes

BENEFITS

- Symmetric ribs with optimized stiffness gradient, giving exceptional control and stability
- Variable length sipes to provide stress relief in blocks and have better traction
- Provide uniform bending stiffness to blocks
- Increased block stiffness for better Handling and Steering while manoeuvring
- For improved Wear Performance and Traction

AVAILABLE SIZES:

235/65 R16

TYRE SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
235/65 R16	P	150	121/119	NA	7.00	84	710	232



JUH STEEL

SALIENT FEATURES

- 5 rib symmetric design
- Zig-zag groove
- Variable depth sipes
- Highly integrated steel belted radial construction
- Stiffer ribs with lower RRC

BENEFITS

- Symmetric design with optimized tread blocks for uniform wear
- Zig-zag circumferential grooves provide optimized tread stiffness, giving unmatched traction
- Variable depth Sipes to provide stress relief in blocks and have better traction
- Optimized construction for better load carrying capacity
- Stiffer ribs with stable shoulder design that meets lower RRC requirement

AVAILABLE SIZES:

7.50 R16

TYRE SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
7.50 R16	N	140	121/120	NA	6.00	95	805	210



SAND CUM HIGHWAY

SALIENT FEATURES

- Aggressive tread pattern
- Stepped grooves
- Block tread design
- Durable & reinforced radial construction
- Offset shoulder design

BENEFITS

- Provides extra traction on harsh terrains
- Gives better floatation in sand application
- Optimised block pattern for efficient grip
- Provides maximum life for off-road applications
- Enables increased traction on soft soil

AVAILABLE SIZES:

7.50R16

TYRE SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
7.50R16	R	170	112/107	NA	6.00	65	799	223



ULTIMA-XPC1

SALIENT FEATURES

- Circumferential grooves with fillets
- Shoulder tie-bars
- Variable depth sipes
- Symmetric pattern design

BENEFITS

- Provide uniform bending stiffness to the blocks
- Increases block stiffness for better handling and steering while manoeuvring
- For improved wear performance and traction
- Symmetric ribs with optimised stiffness gradient, giving exceptional control and stability

AVAILABLE SIZES:

155R12C, 165R13C, 185R14C, 195R14C, 195R15C, 205R16C, 215/70R15C, 225/70R15C, 215/75R16C, 225/75R16C

TYRE SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
155R12C	R	170	88/86	NA	4.50	65	555	155
165R13C	R	170	94/92	NA	4.50	65	590	166
185R14C	R	170	102/100	NA	5.50	65	655	184
195R14C	S	180	106/104	NA	5.50	65	672	195
195R15C	S	180	107/105	NA	5.50	65	698	196
205R16C	R	170	110/108	NA	5.50	65	736	209
215/70R15C	Q	160	109/107	NA	6.50	65	688	220
225/70R15C	R	170	112/110	NA	6.50	65	702	228
215/75R16C	S	180	113/111	NA	6.00	69	727	218
225/75R16C	M	130	121/120	NA	6.00	83	742	212



TRUCK BUS BIAS



TRUCK BUS BIAS PATTERNS



JET RIB CX



JET RIB



JET R PLUS



JET R PLUS SX



JET R MILES



JET ACE



FLEETKING



FLEETKING 100



HI-WAY KING



JET POWER 100



TRAK TUFF DX



POWERTRAK



POWERTRAK+



JET-TRAK



JET-TRAK 39 XTRA



JET TRAK 39 XTRA DX



JET XTRA LOAD



JET XTRA LOAD DX



JETKING



JETKING 10



JETKING DX



JETKING DX+



JET ROCK



FLEETKING BX



JET RIB BX



JET RIB CX

SALIENT FEATURES

- Extra rubber at the center
- Excellent 5 rib tread pattern
- Strong nylon casing
- Tread with a dual radius

BENEFITS

- Good mileage
- Very good steer control
- Lower failures
- Smooth and even wear

AVAILABLE SIZES:

8.25-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
8.25-20	H/16	100	6.50	1006	39.6	250	9.8	14.5	18.3	20 M	2300	5070	825	120	2000	4410	760	110
8.25-20	G/14	110	6.50	1006	39.6	250	9.8	14.5	18.3	20 M	2240	4940	795	115	2000	4410	725	105



JET RIB

SALIENT FEATURES

- Flat and wide tread
- Rounded shoulders
- Aggressive 5 rib sawtooth pattern with optimised sipes
- Tough nylon casing

BENEFITS

- Good mileage
- Excellent control
- High casing reliability and multiple retreads

AVAILABLE SIZES:

9.00-20, 10.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
9.00-20	H/16	110	7.00	1056	41.6	274	10.8	16.5	20.8	20 N	2650	5840	795	115	2325	5205	725	105
9.00-20	G/14	110	7.00	1056	41.6	274	10.8	16.5	20.8	20 N	2570	5670	760	110	2255	4970	690	100
10.00-20	J/18	110	7.50	1081	42.6	290	11.4	17.0	21.4	20 N	3075	6780	825	120	2725	6005	760	110



JET R PLUS

SALIENT FEATURES

- Flat and wide tread
- Rounded shoulders
- Thumb window design
- Tough nylon casing

BENEFITS

- High mileage
- Smooth and easy manoeuvring
- Multiple retreads
- Casing reliability

AVAILABLE SIZES:

10.00-20, 11.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
10.00-20	H/16	110	7.50	1081	42.6	290	11.4	17.0	21.4	20 N	3000	6610	795	115	2650	5840	725	105
10.00-20	J/18	110	7.50	1081	42.6	290	11.4	17.0	21.4	20 N	3075	6780	825	120	2725	6005	760	110
11.00-20	H/16	100	8.00	1114	43.9	306	12.0	17.8	22.4	20RR	3350	7385	790	115	2900	6395	720	105
11.00-20	J/18	100	8.00	1114	43.9	306	12.0	17.8	22.4	20RR	3350	7385	825	120	3000	6615	760	110



JET R PLUS SX

SALIENT FEATURES

- Flat and wide tread
- Rounded shoulders
- Thumb window design
- Tough nylon casing

BENEFITS

- Uniform tread wear
- Smooth and easy manoeuvring
- Enhanced casing life & multiple retreads
- Excellent casing reliability

AVAILABLE SIZES:

10.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
10.00-20	H/16	110	7.50	1081	42.6	290	11.4	13.5	17.0	20 N	3000	6610	795	115	2650	5840	725	105



JET R MILES

SALIENT FEATURES

- Super high NSD
- Thumb buttress design
- Strong nylon casing
- Unique rib geometry

BENEFITS

- Ultimate mileage
- Multiple retreads
- High casing reliability
- Lesser heat development

AVAILABLE SIZES:

8.25-20, 9.00-20, 10.00-20, 11.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
8.25-20	H/16	100	6.50	1008	39.7	249	9.8	15.5	19.5	20 M	2300	5070	825	120	2000	4410	760	110
9.00-20	H/16	100	7.00	1056	41.6	274	10.8	18.8	23.7	20N	2650	5840	795	115	2325	5125	725	105
10.00-20	J/18	110	7.50	1096	43.1	294	11.6	19.4	24.4	20 N	3080	6780	825	120	2700	6005	760	110
10.00-20	H/16	100	7.50	1096	43.1	294	11.6	19.4	24.4	20 N	3000	6610	795	115	2630	5800	725	105
11.00-20	H/16	110	8.00	1132	44.6	308	12.1	19.4	24.4	20RR	3265	7390	795	115	2865	6395	725	105



JET ACE

SALIENT FEATURES

- Tough nylon casing
- Mechanically stable compound
- Next-generation design in sinusoidal pattern

BENEFITS

- High casing reliability even under heavy load
- More number of retreads
- Excellent wear nature with smooth wear

AVAILABLE SIZES:

10.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
10.00-20	H/16	110	7.50	1088	42.8	293	11.5	17.0	21.4	20 N	3000	6610	790	115	2800	6175	720	105
10.00-20	J/18	90	7.50	1088	42.8	293	11.5	17	21.4	20N	3080	6790	825	120	2700	5950	760	110



FLEETKING

SALIENT FEATURES

- Deep tread rubber with unique compound
- Wide flat tread
- Aggressive 5 rib saw toothed pattern with sipes
- Rounded shoulders

BENEFITS

- Extra long life
- Uniform wear and wider grip on road
- Good traction and efficient water channeling
- Smooth manoeuvring

AVAILABLE SIZES:

8.25-20, 9.00-20, 10.00-20, 11.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
8.25-20	G/14	110	6.50	983	38.7	243	9.6	12.3	15.5	20 M	2230	4940	795	115	1960	4410	725	105
9.00-20	G/14	110	7.00	1050	41.7	275	10.8	14.9	18.8	20 N	2575	5675	760	110	2300	5070	690	100
10.00-20	G/14	110	7.50	1074	42.3	289	11.4	15.1	19.0	20 N	2800	6175	690	100	2430	5355	620	90
10.00-20	H/16	110	7.50	1074	42.3	289	11.4	15.1	19.0	20 N	3000	6610	795	115	2650	5840	725	105
11.00-20	G/14	110	8.00	1093	43.0	305	12.0	15.6	19.7	20RR	3000	6610	690	100	2650	5840	620	90
11.00-20	H/16	110	8.00	1093	43.0	305	12.0	15.6	19.7	20RR	3355	7390	795	115	2900	6395	725	105



FLEETKING-100

SALIENT FEATURES

- Standard rubber depth with low heat build up compound
- Wide flat tread
- Aggressive 5 rib saw toothed pattern with spies
- Rounded shoulder

BENEFITS

- Longer life and durable performance
- Uniform wear
- Good traction and efficient water channeling
- Smooth manoeuvring

AVAILABLE SIZES:

9.00-20, 11.00-22.5

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
9.00-20	G/14	110	7.00	1040	41.7	274	10.8	13.0	25.2	20 N	2575	5675	760	110	2300	5070	690	100
11.00-22.5	G/14	110	8.25	1069	42.1	291	11.5	12.5	15.7	-	2800	6175	690	100	2430	5355	620	90
11.00-22.5	H/16	110	8.25	1069	42.1	291	11.5	12.5	15.7	-	3000	6610	795	115	2650	5840	725	105



HI-WAY KING

SALIENT FEATURES

- Wider shoulder grooves and plain shoulder ribs
- Deep sipes with zig-zag pattern
- Wide flat tread
- Unique buttress design

BENEFITS

- Excellent manoeuvrability
- Excellent traction and road grip
- Improved load distribution and wear characteristics
- Excellent heat dissipation and retreadability

AVAILABLE SIZES:

12.00-20

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
				MM	IN	MM	IN	MM	32NDS		LOAD		PRESSURE		LOAD		PRESSURE	
											KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
12.00-20	J/18	110	8.50	1144	45.0	319	12.6	15.2	19.1	20RR	3750	8270	795	115	3350	7390	725	105



JET POWER 100

SALIENT FEATURES

- High tread depth and wider center rib with stepped rib
- Stronger & broader shoulder lugs with connecting reinforcement design
- Excellent bead area design
- High strength nylon casing

BENEFITS

- High mileage & protection from external damages
- Reduced lug shuffling, tread wear and enhanced casing protection
- Good anchorage and load carrying capacity
- Excellent durability and overall performance

AVAILABLE SIZES:

10.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
				MM	IN	MM	IN	MM	32NDS		LOAD		PRESSURE		LOAD		PRESSURE	
											KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
10.00-20	H/16	90	7.50	1088	42.8	288	11.3	22.0	27.7	20 N	3000	6610	790	115	2800	6175	720	105



TRAK TUFF DX

SALIENT FEATURES

- Wider tread with flat rib and broad lugs
- Specially designed bead profile
- Specially developed tread compound
- Superior casing with high fabric strength

BENEFITS

- High mileage and smooth wear
- Stronger bead to suit wide variety of rims
- Excellent resistance to lug chipping and rib tearing
- Excellent load carrying capacity

AVAILABLE SIZES:

9.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
9.00-20	H/16	110	7.00	1055	41.5	272	10.7	20.7	26.1	20 N	2650	5840	795	115	2325	5200	725	105



POWERTRAK

SALIENT FEATURES

- Strong shoulder lugs and center ribs
- Deep treads, bigger buttress window
- Specially reinforced sidewall

BENEFITS

- Good loading capability and excellent performance in on/off road application
- Longer life with cooler running
- Protection against kerbs and side hits

AVAILABLE SIZES:

12.00-24

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
12.00-24	J/18	110	8.50	1263	49.7	332	13.1	21.2	26.7	24 RR	4250	9370	795	115	3750	8270	725	105



POWERTRAK+

SALIENT FEATURES

- Strong shoulder lugs and center Ribs
- Bigger butress window
- Specialty reinforced sidewall
- Cooler running compound

BENEFITS

- Good loading capability and excellent performance in on/off road application
- Longer life with cooler running
- Protection against curbs and side hits
- Longer life and high durability

AVAILABLE SIZES:

12.00-24

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
12.00-24	J/18	110	8.50	1265	49.8	332	13.1	17.9	22.6	24 RR	4250	9370	795	115	3750	8270	725	105



JET-TRAK

SALIENT FEATURES

- Special tread compound with strong rubber matrix
- Strong and clean casing
- Broad pyramid-shaped lugs
- Reinforced bead construction with excellent profile

BENEFITS

- Very good mileage
- Good load carrying capability with good resale value for casing
- Excellent support while carrying load
- Low heat development in bead region

AVAILABLE SIZES:

8.25-20, 9.00-20, 10.00-20, 11.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
8.25-20	H/16	100	6.50	1010	39.8	249	9.8	21.5	27.1	20 M	2300	5070	825	120	2000	4410	760	110
8.25-20	G/14	110	6.50	1010	39.8	249	9.8	21.5	27.1	20 M	2240	4940	795	115	2000	4410	725	105
9.00-20	G/14	110	7.00	1054	41.5	272	10.7	22.2	28.0	20 N	2575	5675	760	110	2300	5070	690	100
9.00-20	H/16	110	7.00	1054	41.5	272	10.7	22.2	28.0	20 N	2650	5840	795	115	2360	5205	725	105
10.00-20	H/16	110	7.50	1084	42.7	288	11.3	22.1	27.8	20 N	3000	6610	795	115	2650	5840	725	105
11.00-20	H/16	100	8.00	1112	43.8	303	11.9	23	29.0	20RR	3265	7200	795	115	2865	6315	725	105
11.00-20	H/16	100	8.00	1112	43.8	303	11.9	23	29.0	20RR	3350	7385	790	115	2900	6395	720	105



JET-TRAK 39 XTRA

SALIENT FEATURES

- Super strong nylon casing with closely packed cords
- Super strong beads
- Special dual tread compound mix combined with a unique lug geometry

BENEFITS

- Excellent load carrying capability and casing reliability
- Excellent anchorage
- Cooler running and high mileage

AVAILABLE SIZES:

10.00-20

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
				MM	IN	MM	IN	MM	32NDS		LOAD		PRESSURE		LOAD		PRESSURE	
											KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
10.00-20	J/18	90	7.50	1096	43.1	295	11.6	22.6	28.5	20 N	3080	6790	825	120	2700	5950	760	110



JET-TRAK 39 XTRA DX

SALIENT FEATURES

- Super strong nylon casing with closely packed cords
- Specially designed bead profile
- Special dual tread compound with a unique lug geometry

BENEFITS

- Good load carrying capacity and casing reliability
- Stronger bead area minimizing bead failures
- Cooler running and high mileage

AVAILABLE SIZES:

10.00-20

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
10.00-20	H/16	90	7.50	1096	43.1	295	11.6	22.6	28.5	20 N	3000	6610	790	115	2800	6175	720	105



JET XTRA LOAD

SALIENT FEATURES

- Strong and clean casing
- Reinforced bead construction
- Wide tread arc width
- Special tread compound with strong rubber mix

BENEFITS

- Good load carrying capacity with high casing reliability
- Good anchorage giving good bead area performance
- Most optimum footprint pressure distribution due to wide contact patch
- Good mileage & cooler running

AVAILABLE SIZES:

8.25-20, 10.00-20, 11.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
8.25-20	H/16	100	6.50	1010	39.8	247	9.7	22.6	28.5	20 M	2300	5070	825	120	2000	4410	760	110
10.00-20	J/18	90	7.50	1084	42.7	288	11.3	22.1	27.8	20 N	3080	6790	825	120	2700	5950	760	110
11.00-20	J/18	100	8.00	1112	43.8	303	11.9	23	29.0	20RR	3350	7385	825	120	3000	6615	760	110



JET XTRA LOAD DX

SALIENT FEATURES

- Strong and Clean casing
- Reinforced bead construction
- Wide tread arc width
- Special tread compound with strong rubber matrix

BENEFITS

- Good load carrying capability with high casing reliability
- Good anchorage thereby good bead area performance
- Most optimum footprint pressure distribution due to wide contact patch
- Good mileage & cooler running

AVAILABLE SIZES:

10.00-20, 11.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
10.00-20	H/16	90	7.50	1084	42.7	288	11.3	22.1	27.8	20 N	3000	6610	790	115	2800	6175	720	105
11.00-20	H/16	90	8.00	1112	43.8	303	11.9	23.0	29.0	20RR	3350	7385	790	115	2900	6395	720	105



JETKING

SALIENT FEATURES

- Special tread compound with strong rubber matrix
- Strong casing
- Broad pyramid-type lugs

AVAILABLE SIZES:

11.00-20, 12.00-20

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
11.00-20	H/16	110	8.00	1096	43.1	300	11.8	22.6	28.5	20RR	3355	7390	795	115	2900	6395	725	105
11.00-20	J/18	110	8.00	1096	43.1	300	11.8	22.6	28.5	20RR	3425	7550	825	120	2985	6580	760	110
12.00-20	J/18	110	8.50	1154	45.4	324	12.8	22.0	27.7	20RR	3750	8270	795	115	3350	7390	725	105

BENEFITS

- Very good mileage
- Good load carrying capability
- Excellent support while carrying load



JETKING-10

SALIENT FEATURES

- Wide center rib with more tread rubber
- Superior nylon casing
- Strong pyramid-type lugs
- Optimised mix of tread depth, casing and lug geometry

AVAILABLE SIZES:

10.00-20

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
				MM	IN	MM	IN	MM	32NDS		LOAD		PRESSURE		LOAD		PRESSURE	
											KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
10.00-20	H/16	110	7.50	1081	42.6	285	11.2	22.0	27.7	20 N	3000	6610	795	115	2650	5840	725	105

BENEFITS

- Excellent mileage
- Excellent retreadability
- Very good road contact and support
- Excellent overall performance



JETKING DX

SALIENT FEATURES

- Special tread compound with strong rubber matrix
- Strong casing
- Broad pyramid-type lugs
- Cooler running rubber compound

BENEFITS

- Very good mileage
- Good load carrying capability
- Excellent support while carrying load
- Longer life and high durability

AVAILABLE SIZES:

12.00-24

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
12.00-24	J/18	110	8.50	1258	49.5	323	12.7	21.9	27.6	24 RR	4250	9370	795	115	3750	8270	725	105



JETKING DX+

SALIENT FEATURES

- Special Tread compound with strong Rubber matrix
- Strong casing
- Broad pyramid type lugs
- Cooler running compound

BENEFITS

- Provides low rolling resistance and good wear characteristics
- Good load carrying capability
- Excellent support while carrying load
- Longer life and high durability

AVAILABLE SIZES:

12.00-24

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
12.00-24	J/18	110	8.50	1258	49.5	323	12.7	19.0	23.9	24 RR	4250	9370	795	115	3750	8270	725	105



JET ROCK

SALIENT FEATURES

- Optimized cavity profile for minimum deflection and less flexing
- Big and broad lugs
- Reinforced bead area
- Special tread and sidewall compound

BENEFITS

- Reduced contact pressure and thereby less heat development
- Excellent support while carrying load and free from chipping
- Good anchorage of the tyre on the rim and uniform pressure distribution
- Better heat dissipation and offer excellent resistant to cuts

AVAILABLE SIZES:

11.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
11.00-20	J/18	90	8.00	1134	44.6	307	12.1	22.0	27.7	20RR	3550	7830	860	125	3075	6780	790	115



FLEETKING BX

SALIENT FEATURES

- Optimized tread depth with unique tread compound
- Aggressive 5 rib saw tooth pattern with optimized sipes
- Wide and flat tread with round shoulder
- Superior casing with high strength fabric

BENEFITS

- Excellent performance
- Good traction and excellent water channeling
- Uniform wear and smooth manoeuvring
- Durable casing

AVAILABLE SIZES:

9.00-20, 10.00-20

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
9.00-20	G/14	110	7.00	1038	40.9	272	10.7	13	16.4	20N	2575	5675	760	110	2300	5070	690	100
10.00-20	H/16	110	7.50	1072	42.2	287	11.30	15.1	19.02	20N	3000	6610	795	115	2650	5840	725	105



JET RIB BX

SALIENT FEATURES

- Extra rubber at the center
- Excellent 5 rib tread pattern
- Strong nylon casing
- Tread with dual radius

BENEFITS

- Good mileage
- Very good steer control
- Lower failures
- Smooth and even wear

AVAILABLE SIZES:

9.00-20

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
9.00-20	G/14	110	7.00	1004	39.5	251	9.9	14.5	18.3	20N	2575	5675	760	110	2300	5070	690	100



LIGHT COMMERCIAL VEHICLE



LIGHT COMMERCIAL VEHICLE PATTERNS



JET RIB



JET RIB SUPER



JET RIB+



JETMILES



JET R MILES



JET RIB AX



JET RIB XTRA



JM 19



TRAK TUF



TRAK TUF XTRA



JET TRAK



JET TRAK +



JET-TRAK 39



JET XTRA LOAD



JET TRAK EX



JET GRIP SUPER



SAND CUM HIGHWAY DX



SAND



JET GRIP A/T



JET GRIP M/T



JUMBO KING



JUMBO



JUMBO MAGIC



JUMBO ACE



JET MILES BX



JET RIB

SALIENT FEATURES

- Flat and wide tread
- Rounded shoulders
- Aggressive 5 rib saw tooth pattern with optimized sipes
- Tough nylon casing

BENEFITS

- High mileage
- Smooth and easy manoeuvring
- Excellent control
- High casing reliability and multiple retreads

AVAILABLE SIZES:

7.00-15, , 7.00-16, 6.50-16, 7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.00-15	E/10	130 / M	5.50	774	30.5	213	8.4	12.3	15.5	15M	1060	2335	520	75	925	2040	520	75
7.00-15	F/12	130 / M	5.50	774	30.5	213	8.4	12.3	15.5	15M	1180	2600	620	90	1030	2270	620	90
7.00-16	F/12	130 / M	5.50	803	31.6	209	8.2	12.5	15.7	16N	1215	2680	620	90	1065	2345	620	90
7.00-16	G/14	130 / M	5.50	803	31.6	209	8.2	12.5	15.7	16N	1320	2910	690	100	1150	2535	690	100
6.50-16	E/10	130 / M	4.50	760	29.9	180	7.1	12.5	15.7	16N	980	2160	520	75	875	1930	520	75
6.50-16	F/12	130 / M	4.50	760	29.9	180	7.1	12.5	15.7	16N	1090	2405	620	90	950	2095	620	90
7.50-16	G/14	130 / M	6.00	825	32.5	223	8.8	12.4	15.6	16N	1500	3305	690	100	1320	2910	690	100
7.50-16	H/16	130 / M	6.00	825	32.5	223	8.8	12.4	15.6	16N	1600	3525	760	110	1400	3085	760	110
7.50-16	F/12	130 / M	6.00	825	32.5	223	8.8	12.4	15.6	16N	1400	3085	620	90	1250	2755	620	90



JET RIB SUPER

SALIENT FEATURES

- Flat and wide tread
- Rounded shoulders
- Aggressive 5 rib saw tooth pattern with optimized spies
- Tough nylon casing

BENEFITS

- High mileage
- Smooth and easy manoeuvring
- Excellent control
- High casing reliability and multiple retreads

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	G/14	130 / M	6.00	825	32.5	223	8.8	12.4	15.6	16 N	1500	3305	690	100	1320	2910	690	100



JET RIB+

SALIENT FEATURES

- Flat and wide tread
- Special tread compound with strong rubber matrix
- Aggressive 5 rib saw tooth pattern with optimized sipes
- Tough nylon casing

BENEFITS

- High mileage
- Provides low rolling resistance and good wear characteristics
- For better heat dissipation
- Excellent control
- High casing reliability and multiple retreads

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	G/14	140/N	6.00	825	32.5	223	8.8	12.4	15.6	16N	1450	3205	655	95	1285	2820	655	95



JETMILES

SALIENT FEATURES

- Next generation of design in sinusoidal pattern
- Specially crafted buttress area
- Specially designed grooves

BENEFITS

- High mileage
- Smooth and easy manoeuvring
- Excellent control
- High casing reliability and multiple retreads

AVAILABLE SIZES:

7.00-16, 7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.00-16	F/12	130 / M	6.00	785	30.9	207	8.1	11	13.9	16N	1215	2680	620	90	1065	2335	620	90
7.00-16	G/14	130 / M	5.50	793	31.2	205	8.1	10.9	13.7	16 N	1320	2910	690	100	1150	2535	690	100
7.50-16	G/14	130 / M	6.00	819	32.2	218	8.6	11.4	14.4	16 N	1500	3305	690	100	1320	2910	690	100



JET R MILES

SALIENT FEATURES

- Super high NSD
- Unique rib geometry with extra stiff tread region in a sinusoidal pattern
- Strong nylon casing

BENEFITS

- Ultimate mileage
- Less flexing of ribs leading to lesser heat generation with smooth wear
- High casing reliability

AVAILABLE SIZES:

7.00-15, 7.50-15, 7.00-16, 7.50-16, 6.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.00-15	E/10	100 / J	5.50	777	30.6	209	8.2	14.5	18.3	15M	1050	2315	515	75	925	2040	515	75
7.00-15	F/12	130 / M	5.50	777	30.6	209	8.2	14.5	18.3	15M	1180	2600	620	90	1030	2270	620	90
7.50-15	G/14	110 / K	6.00	778	30.6	209	8.2	14.5	18.3	15M	1180	3195	650	94	1375	3030	650	94
7.00-16	F/12	100 / J	5.50	805	31.7	209	8.2	14.5	18.3	16M, 16N	1180	2680	620	90	1065	2345	620	90
7.00-16	G/14	100 / J	5.50	805	31.7	209	8.2	14.5	18.3	16M, 16N	1180	2900	690	100	1160	2560	690	100
7.50-16	H/16	110 / K	6.00	830	32.7	222	8.7	15	18.9	16N	1180	3485	760	110	1390	3065	760	110
6.50-16	F/12	130/M	4.50	764	30.1	187	7.4	13	16.4	16N	1180	2405	620	90	950	2095	620	90



JET RIB AX

SALIENT FEATURES

- Tough nylon casing
- Unique rib geometry with extra stiff tread region in a sinusoidal pattern
- Rounded shoulders

BENEFITS

- Less flexing of ribs leading to lesser heat development with smooth wear
- For smooth manoeuvring
- High casing reliability and multiple retreads

AVAILABLE SIZES:

6.50-14

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
6.50-14	D/8	130/M	5.00	702	27.6	194	7.6	9.9	12.5	-	850	1875	415	60	800	1765	415	60
6.50-14	E/10	130/M	5.00	702	27.6	194	7.6	9.5	12.0	-	950	2095	500	72	875	1930	500	72



JET RIB XTRA

SALIENT FEATURES

- Flat and wide tread
- Rounded shoulders
- Aggressive 5 rib saw tooth pattern with optimized sipes
- Tough nylon casing

BENEFITS

- High mileage
- Smooth and easy manoeuvring
- Excellent control
- High casing reliability and multiple retreads

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	G/14	100 / J	6.00	825	32.5	223	8.8	12.4	15.6	16N	1510	3330	650	94	1440	3175	650	94



JM 19

SALIENT FEATURES

- New generation design in sinusoidal pattern
- Specially designed grooves
- Specially crafted buttress area

BENEFITS

- Excellent wear nature with smooth wear characteristics
- Better control and road grip
- Better retreadability

AVAILABLE SIZES:

7.50-16, 8.25-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	H/16	130 / M	6.00	819	32.2	218	8.6	11.4	14.4	16 N	1600	3525	760	110	1400	3085	760	110
8.25-16	H/16	130 / M	6.50	857	33.7	238	9.4	13.5	17.0	16N	-	4065	-	110	-	3870	-	110



TRAK TUF

SALIENT FEATURES

- Special tread compound with strong rubber matrix
- Deep treads with wider shoulder opening
- Strong casing

BENEFITS

- Very good mileage
- Longer life with cooler running
- Good load carrying capacity

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	H/16	130/M	6.00	840	33.1	225	8.9	17.1	21.5	16N	1600	3525	760	110	1400	3085	760	110
7.50-16	G/14	130/M	6.00	840	33.1	225	8.9	17.1	21.5	16N	1500	3305	690	100	1320	2910	690	100
7.50-16	D/8	130/M	6.00	840	33.1	225	8.9	17.1	21.5	16N	1120	2470	415	60	975	2150	415	60



TRAK TUF XTRA

SALIENT FEATURES

- Special tread compound with strong rubber matrix
- Deep treads with wider shoulder opening
- Strong casing

BENEFITS

- Very good mileage
- Longer life with cooler running
- Good load carrying capacity

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	G/14	100/J	6.00	832	32.8	229	9.0	17.1	21.5	16N	1510	3330	650	95	1440	3175	650	95



JET-TRAK

SALIENT FEATURES

- Bigger dimensions with pyramid type lugs
- More tread width and extra rubber with unique rubber compound
- Strong and clean casing
- Strong bead construction

BENEFITS

- Good loading capability
- High mileage
- Good load carrying capability with good retreadability
- Strong bead construction to match casing construction

AVAILABLE SIZES:

6.50-14, 7.00-15, 7.00-16, 7.50-16, 8.25-16, 7.50-15

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
6.50-14	E/10	130 / M	5.00	711	28.0	191	7.5	12	15.1	NA	950	2095	500	72	875	1930	500	72
7.00-15	F/12	130 / M	5.50	787	31.0	214	8.4	15.1	19.0	15 M	1180	2600	620	90	1030	2270	620	90
7.00-16	G/14	130 / M	5.50	804	31.7	207	8.1	16.6	20.9	16N	1320	2910	690	100	1150	2535	690	100
7.50-16	G/14	130 / M	6.00	840	33.1	227	8.9	17.3	21.8	16N	1500	3295	690	100	1320	2900	690	100
7.50-16	H/16	130 / M	6.00	840	33.1	227	8.9	17.3	21.8	16N	1600	3525	760	110	1400	3085	760	110
8.25-16	H/16	130 / M	6.00	864	34.0	239	9.4	17.8	22.4	16N	1850	4065	760	110	1750	3870	760	110
7.50-15	G/14	110/K	6.00	780	30.7	216	8.5	15.1	19.0	15 M	1450	3195	650	94	1375	3030	650	94



JET TRAK +

SALIENT FEATURES

- Bigger dimensions with pyramid type lugs
- More tread width and extra rubber with unique rubber compound
- Strong and clean casing
- Special tread compound with strong rubber matrix

BENEFITS

- Good loading capacity
- High mileage
- Good load carrying capability with good retreadability
- Provides low rolling resistance and good wear characteristics

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	G/14	140/N	6.00	840	33.1	225	8.9	17.3	21.8	16N	1450	3205	655	95	1285	2820	655	95



JET-TRAK 39

SALIENT FEATURES

- Strong casing construction
- Dual bead construction
- Specially developed tread compound

BENEFITS

- Very high load carrying capacity
- Strong bead construction to match casing construction
- Cut-resistant and cooler running

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	G/14	100 / J	6.00	832	32.8	227	8.9	17.3	21.8	16N	1510	3330	650	94	1440	3175	650	94
7.50-16	J/18	100 / J	6.00	837	33.0	227	8.9	17.3	21.8	16N	1650	3635	795	115	1450	3195	795	115



JET XTRA LOAD

SALIENT FEATURES

- Strong and clean casing
- Reinforced bead construction
- Wide tread arc width
- Special tread compound with strong rubber matrix

BENEFITS

- Good load carrying capability with high casing reliability
- Good anchorage thereby good bead area performance
- Most optimum footprint pressure distribution due to wide contact patch
- Good mileage & cooler running

AVAILABLE SIZES:

7.50-16, 8.25-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	J/18	100/J	6.00	840	33.1	222	8.7	17.3	21.8	16N	1650	3635	795	115	1450	3195	795	115
8.25-16	J/18	100/J	6.00	864	34.0	239	9.4	17.8	22.4	16N	1900	4190	795	115	1800	3970	795	115



JET TRAK EX

SALIENT FEATURES

- Bigger dimensions with pyramid type lugs
- More tread width and extra rubber with unique rubber compound
- Strong and clean casing
- Strong bead construction

BENEFITS

- Good loading capacity
- High mileage
- Good load carrying capability with good retreadability
- Strong bead construction to match casing construction

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	H/16	130 / M	6.00	840	33.1	227	8.9	17.3	21.8	16N	1600	3525	760	110	1400	3085	760	110



JET GRIP SUPER

SALIENT FEATURES

- Bigger dimensions with non-directional pattern
- Step lug and continuous sub-depth at center
- Non-parallel groove angles
- Wider groove widths at the shoulder

BENEFITS

- Good loading capacity
- Excellent pull/traction in muddy terrain and better lug stability
- Non-parallel groove angles offer better stone ejection
- Suitable for muddy terrain and self cleaning

AVAILABLE SIZES:

8.25-16

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
8.25-16	H/16	110/K	6.50	867	34.1	239	9.4	17	21.4	16N	1850	4080	760	110	1750	3860	760	110



SAND CUM HIGHWAY DX

SALIENT FEATURES

- Extra wide tread
- Double chevron tread pattern design
- Uniform internal grooves inside the main groove
- Specially developed tread compound

BENEFITS

- Reduced contact pressure in sand terrain for better grip
- Excellent grip and traction in both sand terrain and highway
- Accommodating extreme weather conditions
- Excellent grip in sand terrain

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	D/8	120/L	5.50	832	32.8	224	8.8	12.5	15.7	16N	1090	2405	415	60	-	-	-	-



SAND

SALIENT FEATURES

- Balloon shaped cavity.
- Plain and straight rib tread pattern.
- Flexible sidewall region.
- Specially developed tread compound .

BENEFITS

- Reduced contact pressure in sand terrain for better grip
- Minimum rolling resistance & reduced soil disturbance.
- Excellent floatation
- Accommodating extreme weather conditions

AVAILABLE SIZES:

9.00-16, 9.00-17

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
9.00-16	D/8	140/N	6.50	860	33.9	260	10.237	9	11.3	-	1360	3000	310	45	-	-	-	-
9.00-17	D/8	140/N	7.00	887	34.9	267	10.512	9	11.3	-	1450	3195	310	45	-	-	-	-



JET GRIP A/T

SALIENT FEATURES

- Optimized tread depth with wider center rib
- Aggressive saw tooth center rib
- Tough nylon casing
- Strong sturdy lugs with Improved design at shoulder

BENEFITS

- High mileage
- Good steering control and comfortable ride
- High casing reliability, good load carrying capacity and better retreadability
- Enhanced traction and faster cooling

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	12	100/J	6.00	837	33.0	230	9.056	15	18.9	16N	1450	3195	620	90	1360	3000	620	90
7.50-16	G/14	130/M	6.00	837	33.0	230	9.056	15	18.9	16N	1500	3305	655	95	1400	3085	655	95
7.50-16	H/16	130/M	6.00	837	33.0	230	9.056	15	18.9	16N	1600	3525	760	110	1400	3085	760	110



JET GRIP M/T

SALIENT FEATURES

- High tread depth with wider center rib
- Continuous center rib design.
- Tough nylon casing
- Unique buttress design

BENEFITS

- High mileage
- Excellent steering control in muddy surface
- High casing reliability and load carrying capacity
- Better cleaning in mud terrain

AVAILABLE SIZES:

7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.50-16	E/10	100/J	6.00	823	32.4	230	9.1	15	18.9	16N	1250	2755	380	55	1120	2470	380	55
7.50-16	F/12	130/M	6.00	823	32.4	230	9.056	15	18.9	16N	1450	3195	415	60	1360	3000	415	60
7.50-16	G/14	130/M	6.00	823	32.4	230	9.056	15	18.9	16N	1500	3305	655	95	1400	3085	655	95
7.50-16	H/16	130/M	6.00	823	32.4	230	9.056	15	18.9	16N	1600	3525	760	110	1400	3085	760	110



JUMBO KING

SALIENT FEATURES

- Elephantine dimensions in terms of OD and width
- Strong & sturdy lugs with high tread depth
- Strong nylon casing
- Optimised cavity profile

BENEFITS

- Extra load carrying capacity
- Excellent traction in heavy load with no slippage
- High casing reliability under heavy load condition
- Optimum contact pressure distribution, thereby good mileage

AVAILABLE SIZES:

5.00-12, 6.00-14, 5.50-13, 6.00-13, 155/80D12, 165D13, 165D14, 195/80D15, 175D14, 185D14

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
5.00-12	D/8	100/J	3.50	577	22.7	147	5.8	10.5	13.23	-	487	1075	400	58	462	1020	400	58
5.00-12	E/10	110/K	3.50	577	22.7	147	5.8	10.5	13.23	-	560	1235	495	72	530	1170	495	72
5.00-12	G/14	110/K	3.50	581	22.9	148	5.8	10.3	12.98	-	690	1520	660	95	630	1390	660	95
6.00-14	F/12	110/K	4.50	644	25.4	177	7	12.5	15.75	-	925	2040	575	83	850	1875	575	83
5.50-13	G/14	110/K	4.00	667	26.3	169	6.7	14.2	17.89	-	950	2095	600	87	900	1985	575	83
6.00-13	F/12	110/K	4.50	667	26.3	174	6.9	14.2	17.89	-	925	2039	575	83	875	1929	575	83
155/80D12	D/8	100/J	4.50	563	22.2	161	6.339	11.5	14.5	-	560	1235	450	65	530	1170	450	65
165D12	D/8	120/L	4.50	574	22.6	159	6.259	12.7	16	-	580	1280	450	65	530	1170	450	65
165D13	D/8	100/J	4.50	609	24	172	6.78	12.7	16	-	670	1475	450	65	630	1390	450	65
165D14	D/8	120/L	5.00	633	24.9	175	6.889	12.7	16	-	730	1610	450	65	690	1520	450	65
195/80D15	D/8	110/K	5.50	705	27.8	199	7.84	14	17.6	-	850	1875	415	60	775	1710	415	60
175D14	D/8	100/J	5.00	649	25.6	185	7.29	12.7	16	-	775	1710	450	65	750	1655	450	65
185D14	E/10	110/K	5.50	665	26.2	195	7.68	12.7	16	-	975	2150	575	83	925	2040	575	83



JUMBO

SALIENT FEATURES

- Elephantine dimensions in terms of OD and width
- Strong nylon casing
- High NSD
- New generation sinusoidal ribs with connecting grooves

BENEFITS

- Extra load carrying capacity
- Good structural strength
- High mileage
- High casing reliability

AVAILABLE SIZES:

5.00-12, 165D13, 165D14, 175D14, 185D14, 195/80D15

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
5.00-12	D/8	100/J	3.50	577	22.7	147	5.795	8.5	10.7	-	487	1075	400	58	462	1020	400	58
5.00-12	E/10	110/K	3.50	577	22.7	147	5.788	8.5	10.7	-	560	1235	495	72	530	1170	495	72
165D13	D/8	100/J	4.50	609	24.0	172	6.772	10.5	13.2	-	670	1475	450	65	630	1390	450	65
165D14	D/8	120/L	5.00	631	24.8	182	7.166	10.5	13.2	-	730	1610	450	65	690	1520	450	65
175D14	D/8	100/J	5.00	647	25.5	185	7.284	10.5	13.2	-	775	1710	450	65	750	1655	450	65
185D14	D/8	100/J	5.50	663	26.1	195	7.678	10.5	13.2	-	850	1875	450	65	800	1765	450	65
195/80D15	D/8	110/K	5.50	705	27.8	202	7.953	11.8	14.9	-	850	1875	415	60	775	1710	415	60



JUMBO MAGIC

SALIENT FEATURES

- 5 RIB sinusoidal pattern design with optimized sipes
- Flat and wide tread
- High NSD
- Strong nylon casing

BENEFITS

- Excellent control, smooth and easy maneuvering
- Good stability and high mileage
- Very good mileage
- High casing reliability

AVAILABLE SIZES:

155/80D12

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
155/80D12	D/8	100 / J	4.50	563	22.2	155	6.11	10	12.6	-	560	1235	450	65	530	1170	450	65



JUMBO ACE

SALIENT FEATURES

- Elephantine dimensions in terms of overall diameter and width
- Strong nylon casing with higher strength fabric
- High NSD
- New generation sinusoidal ribs with connecting grooves

BENEFITS

- Excellent load carrying capacity due to high inner volume
- Good structural capability
- Very good mileage
- Smooth wear and good part worn appearance

AVAILABLE SIZES:

165D12

SIZE	LR/ PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
165D12	D/8	120/L	4.50	577	22.7	169	6.65	10	12.6	-	580	1280	450	65	530	1170	450	65



JET MILES BX

SALIENT FEATURES

- New generation of design in sinusoidal pattern
- Specially crafted buttress area
- Specially designed grooves

BENEFITS

- Excellent wear nature with smooth wear characteristics
- Better retreadability
- Better for stone ejection

AVAILABLE SIZES:

7.00-16, 7.50-16, 7.50-16, 7.50-16, 7.50-16

SIZE	LR/PR	MAX SPEED KMPH	RIM (IN)	MAXIMUM OUTER DIAMETER		MAXIMUM SECTION WIDTH		TREAD DEPTH		APP. FLAPS	MAXIMUM TYRE LOAD (SINGLE)				MAXIMUM TYRE LOAD (DUAL)			
											LOAD		PRESSURE		LOAD		PRESSURE	
				MM	IN	MM	IN	MM	32NDS		KGS	LBS	KPA	PSI	KGS	LBS	KPA	PSI
7.00-16	E/10	130 / M	6.00	783	30.83	205	8.07	11.5	14.5	16N	1150	2535	520	75	1120	2470	520	75
7.50-16	E/10	130 / M	6.00	817	30.83	216	8.50	11.9	15.0	16N	1250	2755	485	70	1180	2600	485	70
7.50-16	F/12	130 / M	6.00	817	32.17	216	8.50	11.9	15.0	16N	1450	3197	655	95	1400	3085	655	95
7.50-16	G/14	130 / M	6.00	817	32.17	216	8.50	11.9	15.0	16N	1500	3305	690	100	1320	2910	690	100
7.50-16	H/16	130 / M	6.00	817	32.17	220	8.66	11.9	15.0	16N	1600	3525	760	110	1400	3085	760	110



PCR/SUV



PCR/SUV PATTERNS



ULTIMA NEO



ULTIMA NXT



ULTIMA SPORT



ULTIMA 210S



ULTIMA LXT



ULTIMA XPS



ELANZO TOURING



ELANZO SUPRA



UX ROYALE



RANGER H/T



RANGER A/T



RANGER M/T



RANGER XAT



UX ALP



UX1



UX TOURING



BLAZZE H/T



TORNADO



TAXIMAX



BLAZZE XAT



VECTRA



ZEPHYR



LEVITAS ULTRA



ULTIMA NEO

SALIENT FEATURES

- Shark-winglet shoulder
- Low rolling resistance tread pattern
- Variable groove-depth
- Optimised foot print shape and pressure distribution

BENEFITS

- Serene driving comfort with secured handling performance
- Lower rolling resistance, and tread stiffness, optimised for lower wear and lower noise
- Optimised Binary Flexural Rigidity (OBFR) tread design improves steering maneuverability, proprietary tread edge designs, minimizes noise
- Ultima NEO (New Eco Optimised) for RRC wear and noise, offers better traction, ride comfort and noise levels

AVAILABLE SIZES:

175/70 R12, 165/70 R13, 175/70 R13, 185/70 R13, 145/80 R12, 145/80 R13, 155/65 R13, 155/70 R13, 155/80 R13, 165/80 R13, 155/65 R14

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
175/70 R12	H	210	80	400 A B	5.00	51	551	176
165/70 R13	H	210	79	400 A B	5.00	51	565	168
175/70 R13	T	190	82	400 A B	5.00	51	571	178
185/70 R13	H	210	86	400 A B	5.50	51	590	187
145/80 R12	T	190	74	NA	4.00	51	537	145
145/80 R13	S	180	75	NA	4.00	51	560	144
155/65 R13	T	190	73	NA	4.50	51	535	158
155/70 R13	T	190	75	400 A B	4.50	51	549	151
155/80 R13	T	190	79	400 A B	4.00	51	579	159
165/80 R13	T	190	83	400 A B	4.50	51	591	168
155/65 R14	T	190	75	NA	4.50	51	558	160



ULTIMA NXT

SALIENT FEATURES

- Continuous centre rib
- Robust lateral blocks and hydro channels
- Unique split wing design
- Special tread compound

BENEFITS

- Better straight-line stability
- Excellent wet and dry handling
- Provided good dry and wet traction
- Excellent abrasion resistance and fuel economy

AVAILABLE SIZES:

145/70R12, 145/80R12, 145/80R13, 145/70R13, 155/70R13

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
145/70R12	T	190	69	NA	4.50	51	513	145
145/80R12	T	190	74	NA	4.00	51	536	142
145/80R13	S	180	75	NA	4.00	51	562	145
145/70R13	T	190	71	NA	4.50	51	540	142
155/70R13	T	190	75	NA	4.50	51	547	153



ULTIMA SPORT

SALIENT FEATURES

- Shoulder stiffness gradient optimized
- Optimized pitch sequence
- Optimized footprint shape and pressure distribution

BENEFITS

- For best cornering characteristics
- Low noise
- Better traction, ride comfort and noise levels

AVAILABLE SIZES:

185/65 R14, 185/60 R14, 165/70 R12, 165/65 R14, 165/80 R14, 195/60 R14

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
185/65 R14	H	210	86	520 A A	5.50	51	592	189
185/60 R14	H	210	82	400 A B	5.50	51	580	185
165/70 R12	T	190	77	NA	5.00	51	536	159
165/65 R14	S	180	79	400 A B	5.00	51	571	167
165/80 R14	T	190	85	400 A B	4.50	51	617	158
195/60 R14	H	210	86	400 A B	6.00	51	590	203



ULTIMA 210S

SALIENT FEATURES

- Wider tread
- Optimised pattern
- High tensile belts
- Circumferential grooves

BENEFITS

- Better road holding
- High mileage
- Good performance at high speeds with load
- Low noise
- Low aquaplaning

AVAILABLE SIZES:

195/70 R14

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
195/70 R14	S	180	95	400 A A	6.00	51	638	202



ULTIMA LXT

SALIENT FEATURES

- Extra rubber and deeper grooves
- Specially designed tread compound For better handling and stability
- Specially profiled lateral grooves for better wet and dry braking

BENEFITS

- Specially analyzed pitching sequence to ensure low noise level
- Longer durability
- Low rolling resistance and higher fuel economy

AVAILABLE SIZES:

135/70R12, 155/65R12

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
135/70R12	S	180	65	NA	4.00	51	498	136
155/65R12	S	180	71	NA	4.50	51	507	153



ULTIMA XPS

SALIENT FEATURES

- Optimised pattern design for dry and wet braking
- High abrasion resistance tread compound
- Symmetric ribs with optimised pattern stiffness

BENEFITS

- Better braking and cornering stability
- High mileage and long life
- Improved wear performance and traction

AVAILABLE SIZES:

175/70 R13

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
175/70 R13	T	190	82	NA	5.00	51	578	175



ELANZO TOURING

SALIENT FEATURES

- Symmetric touring design
- Central stability rib
- High lateral stiffness pattern
- Rolling optimised high lateral stiffness shoulder blocks
- Unique Structure Coupled Hybrid Pitch Sequence (SCHPS)

BENEFITS

- Surefooted grip and handling on highways
- Superior on-centre feel with enhanced driving stability
- Supreme grip with efficient sipe opening that assists with lateral grip, traction/braking and even smooth wear
- Improved cornering power and control in panic manoeuvre
- Quietest ever ride and highway speeds

AVAILABLE SIZES:

235/65 R17, 235/60 R18, 235/65 R18

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
235/65 R17	H	210	104	580 AA A	7.00	51	740	240
235/60 R18	V	240	103	580 AA A	7.00	51	736	234
235/65 R18	H	210	106	580 AA A	7.00	51	760	244



ELANZO SUPRA

SALIENT FEATURES

- Innovative sidewall design and apex construction
- Macho 4X4 tread pattern
- Unique open shoulder groove design

BENEFITS

- High damping load transfer, function-optimal tyre for excellent ride quality
- Excellent on centre feel and manoeuvrability for high speed applications
- Enhanced wet grip

AVAILABLE SIZES:

245/75R16

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
245/75R16	S	180	111	700 A B	7.00	51	773	246



UX ROYALE

SALIENT FEATURES

- Variable draft groove technology
- Waffle groove and exceptional braking features
- Stable shoulder tread blocks
- Aero-wing design
- Optimised through advanced simulation for optimum road contact
- Superior dual tread compound
- NVH optimised to lower noise

BENEFITS

- Short braking distances and high cornering stability
- Better traction, ride comfort and noise levels
- Superior safety in wet condition
- Ultra high performance at 270 kmph and 300 kmph



AVAILABLE SIZES:

185/55 R16, 175/60 R14, 175/65 R14, 175/65 R15, 175/70 R14, 185/65 R15, 185/65 R14, 185/70 R14, 195/55 R16, 195/65 R15, 205/55 R16, 205/60 R16, 205/65 R15, 205/65 R16, 215/60 R17, 215/60 R16, 215/65 R16, 235/65 R16, 225/60 R16, 225/60 R17, 215/55 R18, 175/65 R15, 205/55 R16, 175/70 R14, 195/65 R15, 205/65 R16, 165/80 R14

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
185/55 R16	H	210	83	440 A A	6.00	51	607	194
175/60 R14	H	210	79	440 A A	5.00	51	564	177
175/65 R14	H	210	82	440 A A	5.00	51	583	175
175/65 R15	H	210	84	440 A A	5.00	51	610	178
175/70 R14	H	210	84	440 A A	5.00	51	598	178
185/65 R15	H	210	88	440 A A	5.50	51	619	186
185/65 R15	T	210	88	440 A A	5.50	51	617	186
185/65 R14	H	210	86	440 A A	5.50	51	590	188
185/70 R14	H	210	88	440 A A	5.50	51	614	184
195/55 R16	V	240	87	440 A A	6.00	51	620	204
195/65 R15	V	240	91	440 A A	6.00	51	638	202
205/55 R16	V	240	91	440 A A	6.50	51	630	210
205/60 R16	V	240	92	440 A A	6.00	51	653	204
205/65 R15	V	240	94	440 A A	6.00	51	646	208
205/65 R16	H	210	95	440 A A	6.00	51	673	209
215/60 R17	H	210	96	460 A A	6.50	51	686	219
215/60 R16	V	240	95	440 A A	6.50	51	661	220
215/65 R16	H	210	98	440 A A	6.50	51	683	222
235/65 R16	T	190	103	440 A A	7.00	51	710	239
225/60 R16	V	240	98	440 A A	6.50	51	674	228
225/60 R17	H	210	99	440 A A	6.50	51	702	228
215/55 R18	H	210	95	400 A A	7.00	51	693	221
175/65 R15	H	210	84	400 A A	5.00	51	609	182
175/70 R14	H	210	84	440 A A	5.00	51	606	178
195/65 R15	V	240	91	440 A A	6.00	51	635	201
205/65 R16	V	240	95	440 A A	6.50	51	673	209
165/80 R14	T	190	85	NA	5.00	51	616	173
*215/55 R16	-	-	-	-	-	-	-	-

* To be launch soon



RANGER H/T

SALIENT FEATURES

- High traction rib design
- Extra fine sipes on tread surface
- Advanced circumferential grooves
- Solid centre and stiff shoulder design
- GA (Genetic Algorithm) noise engineering

BENEFITS

- Exceptional control and stability
- Improved traction for those occasional off-road, sand and mud tracks
- Improved safety on wet roads by efficient water dispersion
- Precise straight line and cornering steering control
- Low cabin noise for luxurious driving



AVAILABLE SIZES:

215/75 R15, 205/60 R16, 215/65 R16, 215/75 R16, 225/65 R17, 235/65 R17, 235/70 R16, 235/75 R15, 265/65 R17, 265/70 R16, 265/75 R16, 275/70 R16, 265/70 R17, 215/60 R17, 255/60 R18, 275/70 R16, 265/70 R17, 265/65R17 LT, 255/60 R16, LT245/75 R16, LT235/85 R16, 245/65 R17, 255/65 R17, 265/70 R17, 265/70 R18, 275/65 R18, 245/60 R18

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
215/75 R15	S	180	100	460 A A	6.00	51	705	216
205/60 R16	H	210	92	460 A A	6.00	51	648	208
215/65 R16	H	210	98	460 A A	6.50	51	689	218
215/75 R16	T	190	101	460 A A	6.00	51	731	216
225/65 R17	H	210	102	460 A A	6.50	51	726	228
235/65 R17	H	210	104	460 A A	7.00	51	740	236
235/70 R16	H	210	105	460 A A	7.00	51	735	236
235/75 R15	T	190	105	460 A A	6.50	51	734	235
265/65 R17	H	210	112	460 A A	8.00	51	776	264
265/70 R16	T	190	111	460 A A	8.00	51	777	266
265/75 R16	T	190	114	460 A A	7.50	51	806	264
275/70 R16	T	190	114	460 A A	8.00	51	794	282
265/70 R17	T	190	115	460 A A	8.00	51	805	264
215/60 R17	H	210	96	460 A A	6.50	51	688	221
255/60 R18	H	210	108	460 A A	7.50	51	759	260
275/70 R16	T	190	114	460 A A	8.00	51	794	282
265/70 R17	T	190	115	460 A A	8.00	51	805	264
265/65R17 LT	L	-	120/117	NR	-	-	777	278
*255/60 R16	-	-	-	-	-	-	-	-
*LT245/75 R16	-	-	-	-	-	-	-	-
*LT235/85 R16	-	-	-	-	-	-	-	-
*245/65 R17	-	-	-	-	-	-	-	-
*255/65 R17	-	-	-	-	-	-	-	-
*265/70 R17	-	-	-	-	-	-	-	-
*265/70 R18	-	-	-	-	-	-	-	-
*275/65 R18	-	-	-	-	-	-	-	-
*245/60 R18	-	-	-	-	-	-	-	-

* To be launch soon

(Note: - Also available in Blaze for US market)



RANGER A/T

SALIENT FEATURES

- Full depth grooves
- Variable draft groove technology
- Aggressive tread pattern
- Light truck construction in most sizes
- Larger mass tread blocks

BENEFITS

- Provides optimum road contact offering supreme grip
- Optimised pitch sequence for provide even tread wear and reduced tread noise
- Superior off road traction
- Increased puncture resistance
- Improved wear life and cut chip resistance

AVAILABLE SIZES:

215/75 R15, 235/70 R16, 31X10.5 R15, 205/70 R15C, 255/70 R15C, 215R15, 215/75 R15-RWL, 235/70 R16-RWL, 215/70 R15C

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
215/75 R15	S	180	100	300 A A	6.00	51	705	216
235/70 R16	T	190	105	300 A A	7.00	51	735	236
31X10.5 R15	Q	160	109	NA	8.50	65	773	265
205/70 R15C	S	180	106/104	NA	6.00	65	671	206
255/70 R15C	S	180	113/110	NA	7.50	65	740	260
215R15	R	170	113	NA	6.00	65	726	218
215/75 R15-RWL	S	180	100	300 A A	6.00	51	705	216
235/70 R16-RWL	T	190	105	300 A A	7.00	51	735	236
215/70 R15C	S	180	109/107	NA	6.50	65	682	220

(Note: - Also available in Blaze for US market)



RANGER M/T

SALIENT FEATURES

- Chevron tread pattern design
- High wear resistant tread compound
- Extreme all terrain pattern with rugged shoulder design
- New generation reinforcement materials

BENEFITS

- Improved traction and better grip in mud and sand applications
- Longer life providing very low cost per km
- Better off roading performance
- Improved off roading performance & better durability in extreme conditions

AVAILABLE SIZES:

265/70R17LT, 31X10.50 R15, LT 245/75 R16, LT 265/75 R16, LT 255/65R18, LT 235/70R16, LT235/85 R16, LT265/75R16, LT235/75R15, LT285/75R16

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
265/70R17LT	Q	160	118/115	NA	8.00	65	810	270
31X10.50 R15	Q	160	109	NA	8.50	50	775	275
*LT235/85 R16	-	-	-	-	-	-	-	-
*LT265/75R16	-	-	-	-	-	-	-	-
*LT235/75R15	-	-	-	-	-	-	-	-
*LT285/75R16	-	-	-	-	-	-	-	-

* To be launch soon

(Note: - Also available in Blaze for US market)



RANGER X-A/T

SALIENT FEATURES

- Extreme all terrain pattern
- High tensile reinforcements
- Optimized belt vibrations
- Optimized pitch sequence and groove width through TNAP
- A optimized footprint distribution

BENEFITS

- Enhanced traction on all kind of surfaces
- High structural stability and durability on any kind of application
- Softer ride and better handling
- To reduce noise & air pumping at high speed
- Enhanced milage and grip



AVAILABLE SIZES:

31X10.5R15 LT, 32X11.5R15, LT235/75 R15, 215/75 R15-TT, 215/75 R15-TL, 235/75 R15-TT, 235/75 R15-TL, 235/65 R17, 265/65 R17, 265/60 R18, 255/65 R18

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
31X10.5R15 LT	R	170	109	NA	8.50	50	774	281
32X11.5R15	R	170	113	NA	9.00	50	798	302
LT235/75 R15	R	170	104/101	NA	6.50	50	732	233
215/75 R15-TT	S	180	100	NA	6.00	51	700	216
215/75 R15-TL	S	180	100	NA	6.00	51	700	216
235/75 R15-TT	S	180	105	NA	6.50	51	730	235
235/75 R15-TL	S	180	105	NA	6.50	51	730	235
235/65 R17	T	190	104	NA	7.00	51	740	236
265/65 R17	H	210	112	NA	8.00	51	775	272
265/60 R18	H	210	110	NA	8.00	51	775	272

(Note: - Also available in Blaze for US market)

UX ALP

SALIENT FEATURES

- Robust shoulder design and specially optimised tread blocks
- Advanced tread compound
- Optimised winter sipes with higher number of cutting edges
- Advanced sipe design and footprint optimised for snow and ice performance

BENEFITS

- Better handling stability in snow and ice, honey comb sipes generates effective wet traction, snow and ice traction
- Optimised snow handling and balanced wet slush performance
- Adaptive conour allows the footprint to develop such that tread edges are able bite in to snow and ice, removes aqua-planing, creates traction points in snow and ice



AVAILABLE SIZES:

185/65 R15, 195/65 R15, 205/60 R16

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
185/65 R15	T	190	88	NA	5.50	51	622	189
195/65 R15	V	240	91	NA	6.00	51	638	202
205/60 R16	V	240	92	NA	6.00	51	652	210



UX1

SALIENT FEATURES

- High strength, extra flexible sidewall
- Genetic algorithm used for optimised pitch sequence
- Variable groove geometry/sturdy shoulder blocks
- Specially designed asymmetric tread design

BENEFITS

- Unmatched ride comfort and durability, Specially on pothole-damaged roads
- Least noise, silent running
- Superb handling, extra grip and safety
- High speed control and better handling response

AVAILABLE SIZES:

215/50 R17, 215/55 R17, 225/55 R17, 235/45 R18, 225/60 R18, 245/40 R18, 245/45 R17, 245/45 R18, 195/55 R15, 195/60 R15, 205/60 R15, 235/55 R17, 225/50 R17, 205/55 R16

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
215/50 R17	V	240	95	480 A A	7.00	51	650	220
215/55 R17	V	240	98	480 A A	7.00	51	666	227
225/55 R17	V	240	101	480 A A	7.00	51	677	229
235/45 R18	V	240	98	480 A A	8.00	51	666	236
225/60 R18	H	210	104	480 A A	6.50	51	728	226
245/40 R18	W	270	97	480 A A	8.50	51	653	246
245/45 R17	V	240	99	480 A A	8.00	51	650	243
245/45 R18	W	270	100	480 A A	8.00	51	676	243
195/55 R15	V	240	89	480 A A	6.00	51	598	197
195/60 R15	V	240	92	480 A A	6.00	51	619	207
205/60 R15	V	240	95	480 A A	6.00	51	629	214
235/55 R17	V	240	103	480 A A	7.50	51	695	245
225/50 R17	V	240	98	480 A A	7.00	51	658	228
205/55 R16	V	240	94	480 A A	6.50	51	633	212
*215/45 R17	-	-	-	-	-	-	-	-
*225/45 R17	-	-	-	-	-	-	-	-
*235/45 R17	-	-	-	-	-	-	-	-
*225/40 R18	-	-	-	-	-	-	-	-
*225/45 R18	-	-	-	-	-	-	-	-
*255/40 R18	-	-	-	-	-	-	-	-
*235/55 R18	-	-	-	-	-	-	-	-

*To be launch soon



UX TOURING

SALIENT FEATURES

- Highest UTQG rated tyre
- Touring tread design with specialised central rib
- High control design pattern and robust shoulder blocks
- GA (Genetic Algorithm) noise engineering


BENEFITS

- Best in class tyre life, traction and cooler running
- Precise straight line steering control and comfortable journeys
- Supreme lateral grip and stable cornering on long drives
- Low cabin noise for luxurious driving

AVAILABLE SIZES:

165/65 R14, 165/70 R14, 165/80 R14, 185/65 R14, 185/60 R15, 185/65 R15, 195/55 R16, 175/65 R14, 205/65 R16, 175/60 R15, 205/65 R15, 215/45 R17, 225/45 R17, 235/45 R17, 225/40 R18, 225/45 R18, 255/40 R18, 235/55 R18

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
165/65 R14	T	190	79	NA	5.00	51	568	170
165/70 R14	S	180	81	NA	5.00	51	590	166
165/80 R14	S	180	85	NA	4.50	51	614	169
185/65 R14	H	210	86	NA	5.50	51	600	197
185/60 R15	T	190	84	NA	5.50	51	606	188
185/65 R15	H	210	88	NA	5.50	51	619	186
195/55 R16	H	210	87	480 A A	6.00	51	620	204
175/65 R14	T	190	82	NA	5.00	51	582	178
205/65 R16	H	210	95	480 A A	6.00	51	672	206
175/60 R15	H	210	81	NA	5.00	51	592	176
205/65 R15	V	240	94	480 A A	6.00	51	646	212

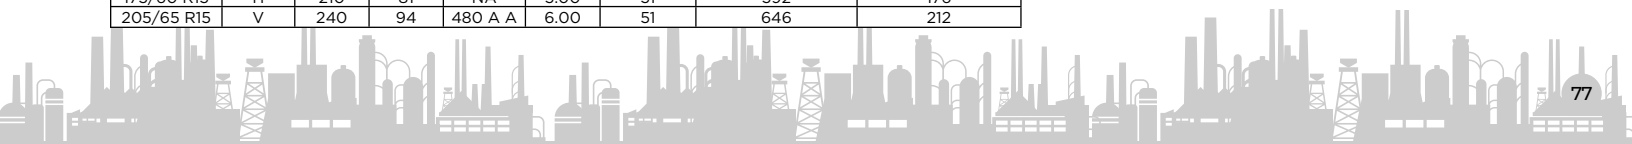

BLAZZE H/T

SALIENT FEATURES

- Robust tread blocks
- Open shoulder design
- High tread depth
- Unique sipe design
- Special tread compound

BENEFITS

- For excellent traction, braking and uniform pressure distribution
- Excellent traction and heat dissipation
- Higher initial tyre mileage
- Improved wet traction and grip
- Excellent abrasion resistance and fuel economy

AVAILABLE SIZES:

215/75 R15, 205/60 R16, 215/65 R16, 215/75 R16, 225/65 R17, 235/65 R17, 235/70 R16, 235/75 R15, 265/65 R17, 265/70 R16, 265/75 R16, 275/70 R16,

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
215/75 R15	S	180	100	460 A A	6.00	51	705	216
205/60 R16	H	210	92	460 A A	6.00	51	648	208
215/65 R16	H	210	98	460 A A	6.50	51	689	218
215/75 R16	T	190	101	460 A A	6.00	51	731	216
225/65 R17	H	210	102	460 A A	6.50	51	726	228
235/65 R17	H	210	104	460 A A	7.00	51	740	236
235/70 R16	H	210	105	460 A A	7.00	51	735	236
235/75 R15	T	190	105	460 A A	6.50	51	734	235
265/65 R17	H	210	112	460 A A	8.00	51	776	264
265/70 R16	T	190	111	460 A A	8.00	51	777	266
265/75 R16	T	190	114	460 A A	7.50	51	806	264
275/70 R16	T	190	114	460 A A	8.00	51	794	282



TORNADO

SALIENT FEATURES

- 4 rib symmetric design
- Higher NSD
- Optimized wet braking
- Steel belts with high cutting resistance

BENEFITS

- Optimized high speed performance , better dry grip and steering
- Excellent mileage and durability.
- Most efficient water drainage from center of contact patch
- High cutting resistance, least creep and best dimensional stability

AVAILABLE SIZES:

175/70 R13, 165/80 R14, 175/65 R14, 155/65 R13, 165/65 R13 , 155/70 R13

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
175/70 R13	T	190	82	300 A B	5.00	51	577	176
165/80 R14	S	180	85	NA	4.50	51	615	163
175/65 R14	T	190	82	YES	5.00	51	581	179
155/65 R13	T	190	73	NA	4.50	51	534	155
165/65 R13	T	190	77	NA	5.00	51	546	168
155/70 R13	S	180	75	NA	4.50	51	548	156



TAXIMAX

SALIENT FEATURES

- Exclusively designed tread compound
Wear and tear resistant
- Double steel belted sidewall
- Specially designed buttoned rib
- Unique design for reduced vibrations

BENEFITS

- Best in class tyre life
- Excellent durability against cut and burst
- Excellent grip and braking
- Extra comfort for rigorous driving

AVAILABLE SIZES:

165/80 R14, 175/65 R14, 145/80 R13, 155/80 R13, 185/60 R15, 185/65 R15, 185/70 R14, 165/65 R14, 165/70 R14, 205/65 R16, 145/80 R12-TT, 145/80 R12-TL, 205/65 R15, 155/70 R13, 145/70 R13

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
165/80 R14	S	180	85	NA	4.50	51	616	158
175/65 R14	T	190	82	NA	5.00	51	582	178
145/80 R13	T	190	75	NA	4.00	51	562	147
155/80 R13	T	190	79	NA	4.50	51	579	155
185/60 R15	T	190	84	NA	5.50	51	606	185
185/65 R15	H	210	88	NA	5.50	51	619	186
185/70 R14	T	190	88	NA	5.50	51	618	187
165/65 R14	T	190	79	NA	5.00	51	566	165
165/70 R14	S	180	81	NA	5.00	51	590	166
205/65 R16	H	210	95	NA	6.00	51	672	205
145/80 R12-TT	T	190	74	NA	4.00	51	536	147
145/80 R12-TL	T	190	74	NA	4.00	51	533	147
205/65 R15	V	240	94	NA	6.00	51	645	207
155/70 R13	T	190	75	NA	4.50	51	549	154
145/70 R13	T	190	71	NA	4.50	51	540	150



BLAZZE X-A/T

SALIENT FEATURES

- Extreme all terrain pattern
- High tensile reinforcements
- Optimized belt vibrations
- Optimized pitch sequence & groove width through TNAP
- A optimized footprint distribution

BENEFITS

- Enhanced traction on all kinds of surfaces
- High structural stability and durability on any kind of application
- Softer ride and better handling
- Reduced noise and air pumping at high speed
- Enhanced mileage and grip

AVAILABLE SIZES:

31X10.5R15, 32X11.5R15, LT235/75 R15

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
31X10.5R15 LT	R	-	109	NA	8.50	50	774	281
32X11.5R15	R	-	113	NA	9.00	50	798	302
LT235/75 R15	R	-	104/101	NA	6.50	50	732	233



VECTRA

SALIENT FEATURES

- Wider contact patch
- Exclusive tread block pattern
- High aesthetics

BENEFITS

- Excellent traction and grip on wet and dry surfaces
- Combines all-terrain traction with a quiet highway ride
- Enhances the visual appeal of the vehicle

AVAILABLE SIZES:

185/70 R14, 195/65 R15, 205/60 R16, 175/65 R14, 155/80 R13, 155/70 R14, 165/70 R14, 175/70 R14, 185/60 R15, 185/65 R15, 175/65R14

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
185/70 R14	T	190	88	440 A B	5.50	51	613	186
195/65 R15	H	210	91	440 A B	6.00	51	638	203
205/60 R16	V	240	92	440 A B	6.00	51	650	203
175/65 R14	H	210	82	440 A B	5.00	51	581	177
155/80 R13	S	180	79	NA	4.50	51	578	157
155/70 R14	T	190	77	NA	4.50	51	574	157
165/70 R14	T	190	81	NA	5.00	51	585	167
175/70 R14	T	190	84	NA	5.00	51	602	184
185/60 R15	T	190	84	NA	5.50	51	603	192
185/65 R15	T	190	88	440 A B	5.50	51	619	187
175/65R14	T	190	82	400 A B	5.00	51	585	175



ZEPHYR

SALIENT FEATURES

- Extra supple sidewalls
- Curved grooves coupled with angular sipes
- Optimised tread distribution

BENEFITS

- Comfortable ride and reduced vibration during high speed manoeuvring
- Most efficient water drainage from centre of contact patch
- Uniform tread wear

AVAILABLE SIZES:

195/65 R15, 205/65 R15

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
195/65 R15	V	240	91	NA	6.00	51	638	203
205/65 R15	V	240	94	NA	6.00	51	650	206



LEVITAS ULTRA

SALIENT FEATURES

- Highly stiff, Asymmetric tread design
- Optimized groove drafts, angled lateral features with stable centre
- Specially engineered tri-tread configuration for optimum grip and high speed endurance
- Optimized pitch sequence cancels noise effectively

BENEFITS

- This has a particularly positive effect on handling and cornering
- Providing fine steering precision and responsive feedback to the driver
- Short braking distances in dry and wet conditions
- Quite running at all speeds

AVAILABLE SIZES:

225/45 R17, 245/45 R17, 225/55 R17, 235/55 R17, 225/55 R16, 225/50 R17, 245/45 R18

SIZE	SPEED RATING	KMPH	LOAD INDEX	UTQG	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
225/45 R17	Y	300	94	NA	7.50	51	631	229
245/45 R17	W	270	99	NA	8.00	51	650	240
225/55 R17	Y	300	101	NA	7.00	51	686	235
235/55 R17	Y	300	103	NA	7.50	51	697	249
225/55 R16	W	270	99	NA	7.50	51	658	237
225/50 R17	Y	300	98	NA	7.00	51	662	230
245/45 R18	W	300	100	NA	8.00	51	682	245



2/3 WHEELERS



2/3 WHEELERS PATTERNS



BLAZE BA 25



BLAZE BR 32



BLAZE F 82



BLAZE BR 11



BLAZE BR 22



BLAZE BA 21



BLAZE BF 32



BLAZE BF 33



BLAZE RYDR BR 41



BLAZE F 81



BLAZE BR 31



JUMBO MILES



BLAZE BR 23



BLAZE BF 11



BLAZE BA 23





BLAZE RYDR BF 41



BLAZE BF 50



BLAZE RYDR BR 43



BLAZE RYDR BR 45



BLAZE BR 34



BLAZE R 42




BLAZE S 61



BLAZE BR 12




BLAZE F 21



BLAZE RYDR BF 43



JUMBO XR



JUMBOMILE SL



BLAZE BA 25

SALIENT FEATURES

- Big center blocks and Zig-zag Intermediate blocks
- Multiple cutting edges
- Tread pattern optimization technology.
- Contour optimization via FEA
- Superior tread rubber

BENEFITS

- Improved straight stability
- Better Traction on "on and off" roads
- Ensures less tread rubber shuffling thus provides excellent tyre mileage
- Good grip and high mileage

AVAILABLE SIZES:

100/90-10, 90/90-12, 90/100-10

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
100/90-10	TL	J	100	56	2.50	36	437±5	102±4
90 100-10	TL	J	100	53	2.15	37	422±5	91±4
90-90-12	TL	J	100	54	2.15	37	472±5	91±4



BLAZE BR 32

SALIENT FEATURES

- Specialized directional grooves
- Rigid shoulder design with cross-cut grooves

BENEFITS

- Great handling and ride comfort
- High grip and cornering Stability

AVAILABLE SIZES:

130/90-15, 100/90-18, 3.00-18, 3.00-17, 80/100-17, 110/90-18

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
130/90-15	TT	P	150	66	3.00	33	620±7	129±4
100/90-18	TL	P	150	56	2.50	33	644±7	104±4
3.00-18	TT	P	150	52	1.85	41	630±7	82±4
3.00-17	TT	P	150	50	1.85	41	604±7	82±4
80/100-17	TL	P	150	53	1.85	33	594 ±7	81 ± 4
110/90-18	TL	P	150	61	2.50	33	663±7	109 ± 4



BLAZE F 82

SALIENT FEATURES

- Unique directional tread pattern
- Mileage booster compound

BENEFITS

- Better stability on all terrains
- High mileage and superior braking

AVAILABLE SIZES:

2.75-17

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
2.75-17	TT	P	150	41	1.85	33	591±7	75±3



BLAZE BR 11

SALIENT FEATURES

- Big and broader center blocks with higher contact area
- L-Shaped optimized sipes
- Optimally designed geometry with strong and heavy shoulder blocks

BENEFITS

- Better wet traction and wet braking
- Improved cornering stability
- Increasing working edge

AVAILABLE SIZES:

2.75-18, 3.00-17, 3.00-18, 80/100-18, 3.50-19

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
2.75-18	TL	P	150	48	1.85	41	618±6	75±3
3.00-17	TL	P	150	50	1.85	41	607±7	81±4
3.00-18	TT/TL	P	150	52	1.85	41	632±7	81±4
80/100-18	TL	P	150	47	1.85	41	622±7	82± 4
3.50-19	TT	P	150	62	2.15	41	680±7	95± 4



BLAZE BR 22

SALIENT FEATURES

- Big and broad center blocks
- Multiple cutting edges

BENEFITS

- Best-in-Class mileage
- Enhanced grip and braking ability

AVAILABLE SIZES:

3.00-17, 3.00-18, 2.75-18

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
3.00-17	TT	P	150	50	1.85	41	607±7	81±4
3.00-18	TT	P	150	52	1.85	41	630±7	81±4
2.75-18	TT	P	150	48	1.85	41	618±5	77±4
3.00-17	TL	P	150	50	1.85	41	608±5	80±4
3.00-18	TL	P	150	52	1.85	41	634±5	82±4
2.75-18	TL	P	150	48	1.85	41	618±5	77±4



BLAZE BA 21

SALIENT FEATURES

- Specialized directional grooves
- Zig-zag center groove
- Rigid shoulder design with cross cut grooves

BENEFITS

- Better handling and good ride comfort
- Improved manoeuvrability and high wet traction
- Good cornering stability and high grip

AVAILABLE SIZES:

3.00-10, 100/80-12, 3.00-12, 90/100-10, 90/90-10, 90/90-12

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
3.00-10	TL	J	100	42	2.10	36	417±7	81±3
100/80-12	TL	J	100	56	2.50	37	468±5	102±3
3.00-12	TL	J	100	47	2.10	37	467±4	82±3
90/100-10	TT	J	100	53	2.50	37	437±4	92±3
90/90-12	TT	J	100	54	2.15	37	469±4	92±3
90/90-10	TL	J	100	50	2.15	37	419±4	92±3
90/90-12	TL	J	100	40	2.50	37	469±4	92±3
90/100-10	TL	J	100	53	2.15	37	437±4	92±3



BLAZE BF 32

SALIENT FEATURES

- Straight center groove
- Specialized directional grooves

BENEFITS

- Great handling and riding comfort
- High grip & cornering stability

AVAILABLE SIZES:

90/90-17, 80/100-17, 80/100-18, 100/80-17, 2.75-17, 2.75-18, 90/90-19

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
90/90-17	TL	P	150	49	2.15	33	597±8	93 ±3
80/100-17	TL	P	150	46	1.85	33	594 ±7	81 ± 4
80/100-18	TL	P	150	47	1.85	33	619±7	81±4
100/80-17	TL	P	150	52	2.50	33	594±7	103±5
2.75-17	TT	P	150	41	1.85	33	591±7	76±4
2.75-18	TT	P	150	42	1.85	33	616±7	76±4
70/100-17	TL	P	150	40	1.60	34	575±4	71±3
90/90-19	TL	P	150	52	2.15	34	648±5	92±4



BLAZE BF 33

SALIENT FEATURES

- Specialised directional grooves
- Rigid shoulder design

BENEFITS

- Good handling and ride comfort
- High Grip and cornering stability

AVAILABLE SIZES:

80/100-17, 110/70-17

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
80/100-17	TL	P	150	46	1.85	33	596 ±7	81 ±4
110/70-17	TL	P	150	54	3.00	34	589±5	111±4



BLAZE RYDR BR 41

SALIENT FEATURES

- Specialized directional grooves
- Rigid shoulder design with cross-cut grooves

BENEFITS

- Great handling and ride comfort
- High grip and cornering stability

AVAILABLE SIZES:

110/80-17, 120/80-17, 130/70-17, 140/70-17, 120/80-16, 120/80-18

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
110/80-17	TL	P	150	57	2.50	33	610±7	114±5
120/80-17	TL	P	150	61	2.75	33	627±7	120±5
130/70-17	TL	P	150	62	3.50	33	616±7	130±5
140/70-17	TL	P	150	66	3.75	33	630±7	139±5
120/80-16	TL	P	150	60	2.75	34	600±7	120±5
120/80-18	TL	P	150	62	2.75	34	652±7	120±5



BLAZE F 81

SALIENT FEATURES

- Unique directional tread pattern
- High synthetic rubber compound

BENEFITS

- Better stability on any road surface
- High grip and long life

AVAILABLE SIZES:

2.75-18

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
2.75-18	TT	P	150	42	1.85	33	617±7	76±4



BLAZE BR 31

SALIENT FEATURES

- Specially designed direction grooves
- Contour optimization via FEA
- Multiple cutting edges to optimize traction

BENEFITS

- Ensures better ride comfort, steady handling and smooth cornering
- Good traction in all condition
- Better straight stability and antiskidding

AVAILABLE SIZES:

100/90-17, 110/80-17, 120/80-17, 100/90-17

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
100/90-17	TL	P	150	55	2.50	33	617±5	101±4
110/80-17	TL	P	150	57	2.50	33	610±5	112±4
120/80-17	TL	P	150	61	2.75	34	628±5	120±4
100/90-17	TT	P	150	55	2.50	34	620±5	104±4



JUMBO MILES

SALIENT FEATURES

- 5 rib with flat tread design
- High performance compound
- Strong nylon casing

BENEFITS

- Long life with better road grip and less tread wear
- High casing reliability

AVAILABLE SIZES:

4.00-8, 4.50-10

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
4.00-8	TT	F	80	76	3.00	62	427±7	116±4
4.50-10	TT	E	70	82	3.50	63	502±5	131±4



BLAZE BR 23

SALIENT FEATURES

- Big centre and zig-zag shoulder blocks
- Multiple cutting edges

BENEFITS

- Excellent stability on uneven roads
- Enhanced grip and braking ability

AVAILABLE SIZES:

100/90-18, 3.00-17, 3.00-18, 2.75-18, 100/90-17

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
100/90-18	TL	P	150	56	2.50	33	643±7	104±4
3.00-17	TT	P	150	50	1.85	41	608±5	80±4
3.00-18	TT	P	150	52	1.85	41	634±5	82±4
2.75-18	TT	P	150	48	1.85	41	618±5	77±4
100/90-17	TL	P	150	55	2.50	34	617±5	104±4



BLAZE BF 11

SALIENT FEATURES

- Free rolling rib design
- Angular cut feature
- Kerb rib feature

BENEFITS

- Good straight stability and high fuel efficiency
- Improved wet traction
- Improved cornering

AVAILABLE SIZES:

2.75-17, 2.75-18, 3.25-19

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
2.75-17	TT	P	150	41	1.85	33	591±7	76±4
2.75-18	TT	P	150	42	1.85	33	618±5	77±4
2.75-17	TL	P	150	41	1.85	33	590±5	76±4
2.75-18	TL	P	150	41	1.85	33	618±5	77±4
3.25-19	TT	P	150	54	2.15	33	668±5	89±4



BLAZE BA 23

SALIENT FEATURES

- Big center and zig-zag shoulder blocks
- Multiple cutting edges

BENEFITS

- Excellent stability on uneven roads
- Enhanced grip and braking ability

AVAILABLE SIZES:

3.50-10, 90/90-12, 90/100-10, 90/90-12, 3.75-12

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
3.50-10	TT	J	100	51	2.50	36	438±7	92±4
90/90-12	TT	J	100	54	2.15	37	469±4	92±3
90/100-10	TT	J	100	53	2.50	37	437±4	92±3
90/90-12	TL	J	100	54	2.15	37	469±4	92±3
90/100-10	TL	J	100	53	2.50	37	437±4	92±3
3.75-12	TT	E	70	66	2.50	50	512±7	101±4



BLAZE RYDR BF 41

SALIENT FEATURES

- Specialized directional grooves
- Rigid shoulder design with cross-cut grooves

BENEFITS

- Great handling and ride comfort
- High grip and cornering stability

AVAILABLE SIZES:

90/90-18

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
90/90-18	TL	P	150	51	2.15	33	622±7	91±4



BLAZE BF 50

SALIENT FEATURES

- Big center and shoulder blocks
- Superior tread rubber
- Uniform parallel grooves

BENEFITS

- Best ride comfort in Off-road conditions
- Excellent grip and Braking control
- Better traction and water channeling

AVAILABLE SIZES:

90/90-19

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
90/90-19	TL	P	150	52	2.15	33	647 ±7	91±5



BLAZE RYDR BR 43

SALIENT FEATURES

- Specially designed pattern with wider grooves for enhanced performance
- Long interconnected cross grooves
- Contour optimization via FEA
- Superior tread rubber
- Advanced cross over groove feature

BENEFITS

- Higher ride comfort and better ride control
- Better water channeling and Traction
- Ensures better handling and smooth cornering
- Good grip and better comfort

AVAILABLE SIZES:

140/60-17, 140/70-17, 150/60-17

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
140/60-17	TL	H	210	63	3.75	230	602±5	141±4
140/70-17	TL	H	210	66	3.75	230	630±5	141±4
150/60-17	TL	H	210	66	4.25	230	615±5	153±4



BLAZE RYDR BR 45

SALIENT FEATURES

- Specially designed pattern with wider grooves for enhanced performance
- Long interconnected cross Grooves
- Contour optimization via FEA
- Superior tread rubber
- Advanced cross over groove feature

BENEFITS

- Higher ride comfort and better ride control
- Better water channeling and traction
- Ensures better handling and smooth cornering
- Good grip and better comfort

AVAILABLE SIZES:

140/70-18

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
140/70-18	TL	H	210	67	3.75	42	655±8	139±4



BLAZE BR 34

SALIENT FEATURES

- Specialized directional grooves
- Rigid shoulder design
- Superior grip

BENEFITS

- Great handling and riding comfort
- High grip and cornering stability
- Better ride comfort

AVAILABLE SIZES:

90/90-18

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
90/90-18	TL	P	150	51	2.15	33	622±7	90±4



BLAZE R 42

SALIENT FEATURES

- Block design with uniform grooves
- Mileage booster compound

BENEFITS

- Apt for water dispersion and ensuring safety on wet roads
- Superior braking and long life

AVAILABLE SIZES:

3.00-17, 2.75-18, 3.00-18

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
3.00-17	TT	P	150	50	1.85	41	607±7	80±4
2.75-18	TT	P	150	48	1.85	41	618±5	77±4
3.00-18	TT	P	150	52	1.85	41	634±5	82±4



BLAZE S 61

SALIENT FEATURES

- Blocks at mid shoulder and edges
- Zig-zag rib pattern

BENEFITS

- Better traction on 'ON and OFF' road application
- High comfort and mileage

AVAILABLE SIZES:

3.50-10

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
3.50-10	TL	J	100	51	2.50	36	438±6	92±4



BLAZE BR 12

SALIENT FEATURES

- Bigger and broader center blocks with higher contact area
- Block design with uniform grooves for aquaplaning
- Tread pattern optimization technology
- Contour optimization via FEA
- Rigid shoulder design

BENEFITS

- Improved straight stability
- Better traction on 'ON and OFF'
- Ensures less tread rubber shuffling thus provides excellent tyre mileage
- Good grip and high mileage

AVAILABLE SIZES:

3.00-17, 2.75-18, 2.75-17

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
3.00-17	TT	P	150	50	1.85	41	604±6	82±4
2.75-18	TT	P	150	48	1.85	41	620±6	77±4
2.75-17	TT	P	150	47	1.85	41	590±6	78±4



BLAZE F 21

SALIENT FEATURES

- Straight line ribbed pattern with lateral cuts
- Mileage booster compound

BENEFITS

- Excellent stability and high fuel efficiency
- High mileage & superior braking

AVAILABLE SIZES:

2.75-18

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
2.75-18	TT	P	150	41	1.85	33	591±7	75±4



BLAZE RYDR BF 43

SALIENT FEATURES

- Straight circumferential groove at centre
- Specialized directional grooves
- Rigid shoulder design
- Superior tread rubber
- Contour optimization via FEA

BENEFITS

- Better handling and good ride comfort
- Good cornering stability and high grip
- Good grip, high mileage and enhanced wet traction
- Ensures better ride comfort, steady handling and smooth cornering

AVAILABLE SIZES:

90/80-17, 100/80-17, 110/70-17

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
90/80-17	TL	H	210	46	2.15	230	580±5	92±4
100/80-17	TL	H	210	53	2.50	230	594±7	102±4
110/70-17	TL	H	210	54	3.00	230	588±5	112±4



JUMBO XR

SALIENT FEATURES

- 5 rib with flat tread design Improves Straight Stability
- Tread pattern optimization technology implemented for good grip and high mileage
- Contour optimization and superior tread rubber for better handling and good ride comfort
- Strong nylon casing ensures high casing

BENEFITS

- Superior Life
- Strong casing

AVAILABLE SIZES:

4.00-8, 4.00-10

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
4.00-8	TT	F	80	50	3.00	62	424±7	115±5
4.00-10	TT	E	70	79	3.00	63	470±4	110±4



JUMBOMILE SL

SALIENT FEATURES

- Semi-lug pattern with aggressive look and better performance at on/off conditions
- High performance compound ensuring long life with better road grip and less tread wear
- Strong nylon casing ensures high casing reliability

BENEFITS

- Superior life
- Superior grip

AVAILABLE SIZES:

4.00-8, 4.50-10

SIZE	TT/TL	SPEED RATING	KMPH	LOAD INDEX	RIM WIDTH (INCH)	MAX PRESSURE (PSI)	UNLOADED INFLATED TYRE DIMENSION	
							OUTER DIAMETER (MM)	SECTIONAL WIDTH (MM)
4.00-8	TT	F	80	70	3.00	62	428±7	117±5
4.50-10	TT	F	80	85	3.50	73	502±7	126±5





JKTYRE & INDUSTRIES LTD.

ADMINISTRATIVE OFFICE

3, Bahadur Shah Zafar Marg, New Delhi – 110002

Ph.: +91 011-66001112, 011-66001122 | Fax: +91 1123322059

REGISTERED OFFICE

Jaykaygram, PO-Tyre Factory, Kankroli-313 342, Rajasthan